

# TESY

It's impressive



PRO

PROFI LINE PROIZVODI



Kombinovani bojleri i bojleri velike litraže sa indirektnim zagrevanjem

## Baferi za toplotne pumpe



| MODEL                        |     | V50 36 |
|------------------------------|-----|--------|
| Proizvod broj                | Nº  | 422570 |
| Zapremina                    | L   | 49.2   |
| Neto težina                  | kg  | 24.2   |
| Toplotni gubici              | W   | 53     |
| Energetska klasa             |     | C      |
| Maksimalna radna temperatura | °C  | 95     |
| Nazivni napon                | bar | 3      |

| Dimenzije ±5 mm |    |      |
|-----------------|----|------|
| h               | mm | 1043 |
| q               | mm | 225  |
| r               | mm | 225  |
| s               | mm | 225  |
| t               | mm | 175  |
| R               | mm | 1103 |
| u               | mm | 190  |
| v               | mm | 330  |
| Ø C             | mm | 360  |
| Ø D             | mm | 260  |

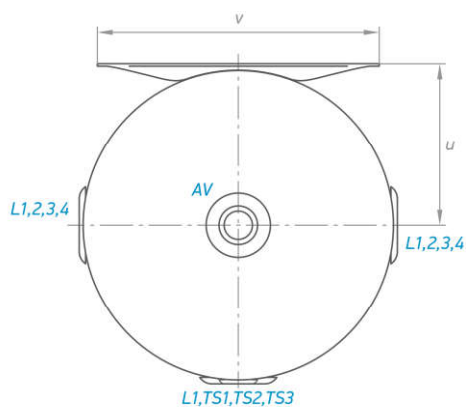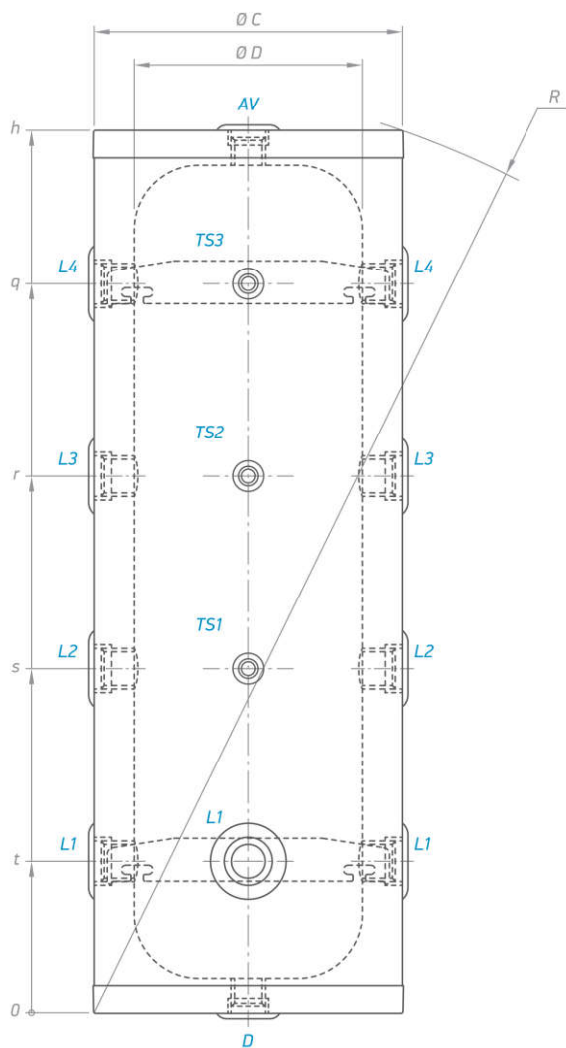

V50 36

|       |                                |       |
|-------|--------------------------------|-------|
| AV    | - odvazdušivač                 | G 1"  |
| D     | - istakanje / grejač           | G 1½" |
| TS1-3 | - nivo kućišta senzora toplote | G ½"  |
| L1-4  | - nivoi                        | G 1½" |

Oznake navoja su saglasno EN ISO 228-1!



Kombinovani bojleri i bojleri velike litraže sa indirektnim zagrevanjem

## Baferi za aktivne rashladne instalacije



| MODEL                            |         | VH 100 55 - AC |
|----------------------------------|---------|----------------|
| Proizvod broj                    | Nº      | 303566         |
| Zapremina                        | L       | 101            |
| Neto težina                      | kg      | 34             |
| Izolacija (čvrsti PU)            | mm      | 73             |
| Toplotni gubici $\Delta T_{45K}$ | kWh/24h | 0.83           |
| Energetska klasa                 |         | A              |
| Maksimalna radna temperatura     | °C      | 95             |
| Nazivni napon                    | bar     | 3              |
| Kućišta senzora toplote          | kom.    | 1              |

| Dimenzije ±5 mm |    |      |
|-----------------|----|------|
| h               | mm | 932  |
| q               | mm | 710  |
| r               | mm | 550  |
| s               | mm | 390  |
| t               | mm | 230  |
| u               | mm |      |
| R               | mm | 1081 |
| Ø C             | mm | 550  |
| Ø D             | mm | 404  |

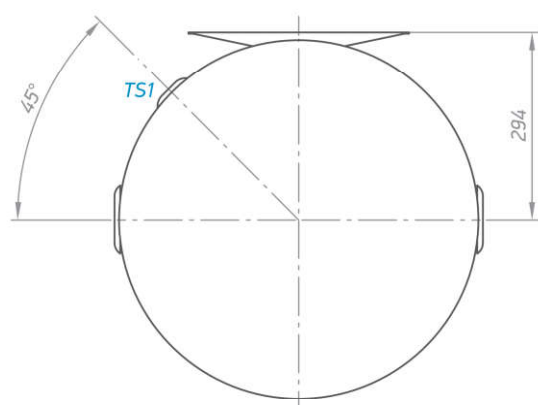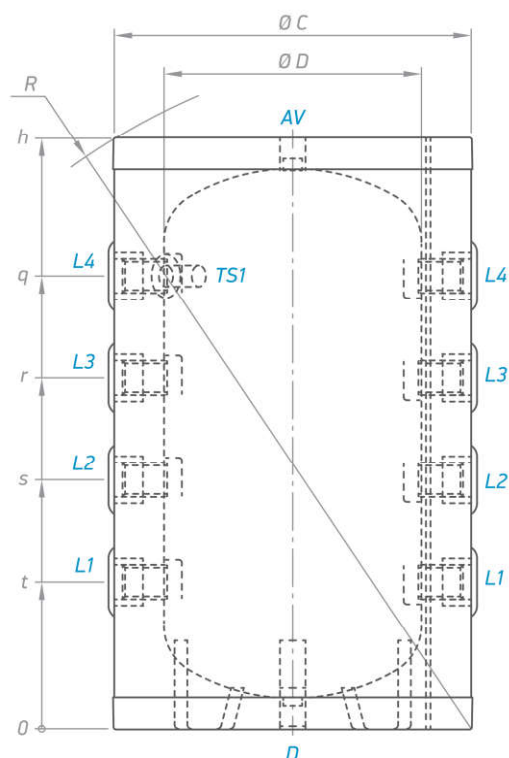



VH 100 55 - AC

|     |                                  |       |
|-----|----------------------------------|-------|
| AV  | - odvazdušivač                   | G ¾"  |
| D   | - istakanje                      | G ¾"  |
| L1  | - nivoi 1                        | G 1½" |
| L2  | - nivoi 2                        | G 1½" |
| L3  | - nivoi 3                        | G 1½" |
| L4  | - nivoi 4                        | G 1½" |
| TS1 | - nivo kućišta senzora toplote 1 | G ½"  |
| TS2 | - nivo kućišta senzora toplote 2 | G ½"  |
| TS3 | - nivo kućišta senzora toplote 3 | G ½"  |
| TS4 | - nivo kućišta senzora toplote 4 | G ½"  |

Oznake navoja su saglasno EN ISO 228-1!

|                                  |         | V 160 60 - AC | V 200 60 - AC |
|----------------------------------|---------|---------------|---------------|
| Proizvod broj                    | Nº      | 303564        | 303565        |
| Zapremina                        | L       | 160           | 202           |
| Neto težina                      | kg      | 40            | 44            |
| Izolacija (čvrsti PU)            | mm      | 50            | 50            |
| Toplotni gubici $\Delta T_{45K}$ | kWh/24h | 1.2           | 1.35          |
| Energetska klasa                 |         | B             | B             |
| Maksimalna radna temperatura     | °C      | 95            | 95            |
| Nazivni napon                    | bar     | 3             | 3             |
| Kućišta senzora toplote          | kom.    | 2             | 2             |

| Dimenzije $\pm 5$ mm |    |      |      |
|----------------------|----|------|------|
| h                    | mm | 1007 | 1202 |
| q                    | mm | 779  | 995  |
| r                    | mm | 586  | 730  |
| s                    | mm | 393  | 465  |
| t                    | mm | 200  | 200  |
| u                    | mm | 75   | 75   |
| R                    | mm | 1169 | 1343 |
| $\varnothing C$      | mm | 600  | 600  |
| $\varnothing D$      | mm | 500  | 500  |

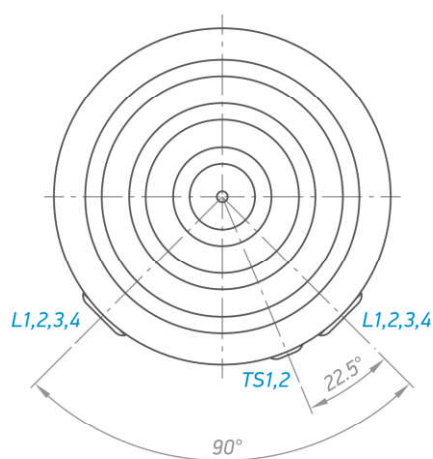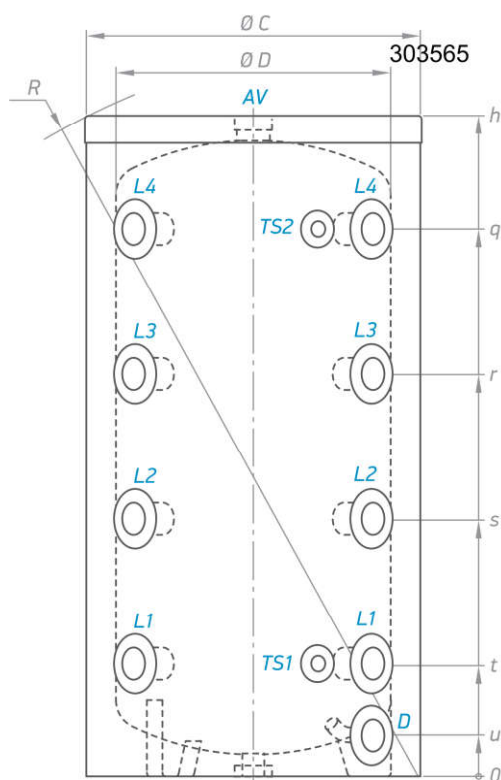

V 160 60 - AC  
V 200 60 - AC

|     |                                  |        |
|-----|----------------------------------|--------|
| AV  | - odvazdušivač                   | G 1½"  |
| D   | - istakanje                      | G ¾" B |
| L1  | - nivoi 1                        | G 1½"  |
| L2  | - nivoi 2                        | G 1½"  |
| L3  | - nivoi 3                        | G 1½"  |
| L4  | - nivoi 4                        | G 1½"  |
| TS1 | - nivo kućišta senzora toplote 1 | G ½"   |
| TS2 | - nivo kućišta senzora toplote 2 | G ½"   |
| TS3 | - nivo kućišta senzora toplote 3 | G ½"   |
| TS4 | - nivo kućišta senzora toplote 4 | G ½"   |

Oznake navoja su saglasno EN ISO 228-1!