

# MULTI Split

MULTI Split

## MULTI Split

Space-saving solution, suitable for the conditioning of many environments.



## OUTDOOR/INDOOR UNIT COMBINATION

Outdoor unit	ENERGY CLASS <sup>1</sup> Cooling/Heating.	WALL MOUNTED INTERNAL UNIT															
		SCHIARA 2 IE2-XY			CRISTALLO IM2-XY				EZCool ILA1-Y			ESSENTIAL 2 IL3-XY					
		27M	35M	20M	27M	35M	53M	70M	27M	35M	53M	70M	20M	27M	35M	53M	70M
MU2-Y 41M	A++/A+	•	•	•	•	•	•	-	•	•	•	-	•	•	•	•	-
MU2-Y 53M	A++/A+	•	•	•	•	•	•	-	•	•	•	-	•	•	•	•	-
MU2-Y 61M	A++/A+	•	•	•	•	•	•	-	•	•	•	-	•	•	•	•	-
MU2-Y 79M	A++/A+	•	•	•	•	•	•	-	•	•	•	-	•	•	•	•	-
MU2-Y 82M	A++/A+	•	•	•	•	•	•	-	•	•	•	-	•	•	•	•	•
MU2-Y 105M	A++/A	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
MU2-Y 125M	A++/A	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

<sup>1</sup>Energy Classes for a 100% combination of the nominal load. For the complete technical data of the combinations, refer to the Combination Tables

Outdoor unit	ENERGY CLASS <sup>1</sup> Cooling/Heating.	COMPACT CASSETTE 4-WAY 650X650 INDOOR UNIT			INDOOR UNITS DUCT				INDOOR UNITS CONSOLE			CEILING/FLOOR INDOOR UNITS.	HOT WATER
		BOX 2 650x650 IB3-XY			DUCT 2 ID3-XY				CONSOLE 3 IC3-Y			C&F 2 IF3-XY	HYDRO-M IHW1-Y
		27M	35M	53M	27M	35M	53M	70M	27M	35M	53M	53M	80M
MU2-Y 41M	A++/A+	•	•	•	•	•	•	-	•	•	•	•	-
MU2-Y 53M	A++/A+	•	•	•	•	•	•	-	•	•	•	•	-
MU2-Y 61M	A++/A+	•	•	•	•	•	•	-	•	•	•	•	-
MU2-Y 79M	A++/A+	•	•	•	•	•	•	-	•	•	•	•	-
MU2-Y 82M	A++/A+	•	•	•	•	•	•	-	•	•	•	•	-
MU2-Y 105M	A++/A	•	•	•	•	•	•	•	•	•	•	•	•
MU2-Y 125M	A++/A	•	•	•	•	•	•	•	•	•	•	•	-

<sup>1</sup>Energy Classes for a 100% combination of the nominal load. For the complete technical data of the combinations, refer to the Combination Tables

ODU-SM 2 41M ÷ 125M



MULTISplit

▶A++

▶A+




## Outdoor unit for MULTISplit systems

### WHY CHOOSE OUTDOOR UNIT-SM 2?

- ✓ From 1 up to 5 connectable indoor units, also of different types
- ✓ Rapid installation: automatic correction of the connection errors
- ✓ Extremely extended operating ranges: Heating  $-15^{\circ}\text{C} \div +24^{\circ}\text{C}$ ; Cooling  $-15^{\circ}\text{C} \div +50^{\circ}\text{C}$

## INCREASED INDOOR UNIT RANGE


MULTI Split

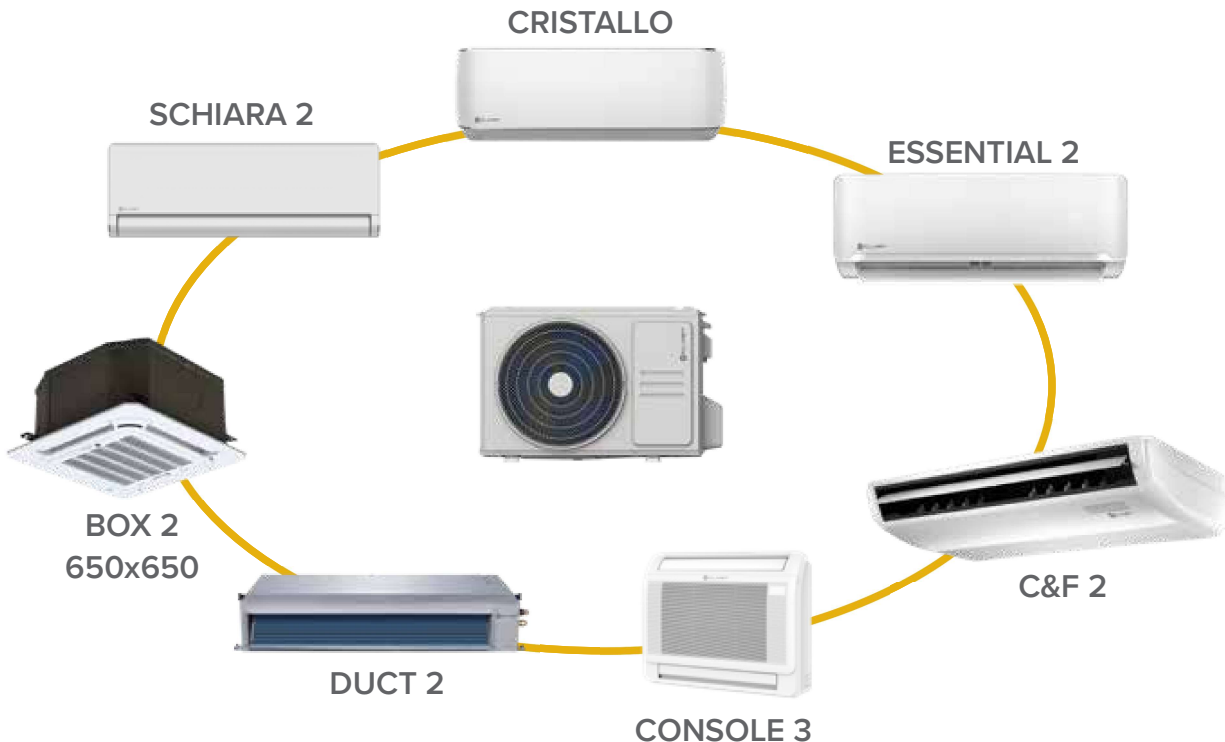

## AUTOMATIC CORRECTION FUNCTION OF PIPING/WIRING ERRORS

The unit reassigns the communication, correcting any wiring errors.

Note: Press the «CHECK» button for 5 seconds until «CE» appears on the display.

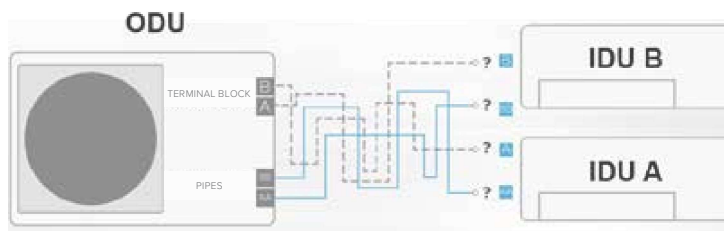

## EVEN ONLY ONE COLLECTABLE IDU

Possibility to add more indoor units after the first installation.



COMFORT    CONVENIENCE    RELIABILITY



technical data

Outdoor unit		MU2-Y	41M	53M	61M	79M	82M	105M	125M
Code			87012281	89112242	89092251	89112265	89092231	89112261	89132206
Connectable Indoor Units		Min~Max	-	1*2 (DUAL)	1*2 (DUAL)	1*3 (TRIPLE)	1*3 (TRIPLE)	1*4 (QUADRI)	1*5 (PENTA)
			14000	18000	21000	27000	28.000	36.000	42000
Cooling capacity	Standard <sup>1</sup> (Min~Max)	Btu/h	(5000~16500)	(7600~19000)	(6800~22500)	(10200~29000)	(7.000~33.600)	(7.000~36.000)	(10.800~42.000)
	Standard <sup>1</sup> (Min~Max)	kW	4,10 (1,5~4,8)	5,30 (2,2~5,6)	6,20 (2,0~6,6)	7,90 (3,0~8,5)	8,20 (2,1~9,8)	10,5 (2,1~10,5)	12,3 (3,2~12,3)
Heating capacity	Standard <sup>2</sup> (Min~Max)	Btu/h	15.000	19.000	22.000	28.000	30.000	37.000	42.000 (11.500-42.000)
	Standard <sup>2</sup> (Min~Max)	kW	4,40 (1,6~4,8)	5,57 (2,3~5,6)	6,44 (1,4~6,7)	8,20 (2,2~8,5)	8,80 (2,3~10,5)	10,8 (2,3~11,1)	12,3 (3,4~12,3)
Dimensions	Unit	L x D x H	mm	805x330x554	805x330x554	890x342x673	890x342x673	946x410x810	946x410x810
	Packaging	L x D x H	mm	915x370x615	915x370x615	1030x438x750	1030x438x750	1090x500x875	1090x500x875
System weight		Unit / Packaging	kg	31,6/34,7	35,0/38,0	43,3/47,1	48,0/51,8	62,1/67,7	68,8/75,6
Sound power		Nominal	dB(A)	65	65	68	68	69	70
Sound pressure level		Nominal	dB(A)	56	56	58	58	61	62
Operating Voltage Range	Cooling	Outdoor T.	°CBS				-15~50		
	Heating	Outdoor T.	°CBU				-15~24		
Refrigerant	Type/GWP					R-32 / 675			
Power supply	Voltage/Frequency/Phases		V/Hz/n°			230 / 50 / 1			

Note: Adapters for connection to the refrigerant piping with different diameters supplied as standard

6°C B.U.

Test conditions:

according to EN14511 / EN12102

Cooling: indoor air temperature 27°C DB/19°C WB; outdoor air temperature 35°C DB/24°C WB;

Heating: indoor air temperature 20°C DB/15°C WB; outdoor air temperature 7°C DB/6°C WB.

Data declared according to UE 626/2011 delegated regulation

<sup>1</sup> Test conditions: indoor air temperature 27°C B.S./ 19°C B.U. - outdoor air temperature 35°C B.S./ 24°C B.U.

<sup>2</sup> Test conditions: indoor air temperature 20°C B.S./ 15°C B.U. - outdoor air temperature 7°C B.S./

MULTI Split


refrigerant piping and connections

Outdoor unit			41M	53M	61M	79M	82M	105M	125M
Max equivalent length (Total)		m	40	40	60	60	80	80	80
Max equivalent length (Each branch)		m	25	25	30	30	35	35	35
Max difference in level ODU / IDU		m	±15	±15	±15	±15	±15	±15	±15
Max difference in level IDU / IDU		m	±10	±10	±10	±10	±10	±10	±10
Refrigerant precharge		kg / m	1,10 / (2x7,5)	1,25 / (2x7,5)	1,5 / (3x7,5)	1,85 / (3x7,5)	2,10 / (4x7,5)	2,10 / (4x7,5)	2,90 / (5x7,5)
External diameters (ODU)	Liquid	mm / inch	2 x (Φ6,35 - 1/4")	2 x (Φ6,35 - 1/4")	3 x (Φ6,35 - 1/4")	3 x (Φ6,35 - 1/4")	4 x (Φ6,35 - 1/4")	4 x (Φ6,35 - 1/4")	5 x (Φ6,35 - 1/4")
	Gas	mm / inch	2 x (Φ9,52 - 3/8")	2 x (Φ9,52 - 3/8")	3 x (Φ9,52 - 3/8")	3 x (Φ9,52 - 3/8")	3 x (Φ9,52 - 3/8") + 1 x (Φ12,7 - 1/2")	3 x (Φ9,52 - 3/8") + 1 x (Φ12,7 - 1/2")	4 x (Φ9,52 - 3/8") + 1 x (Φ12,7 - 1/2")

Indoor unit			20M	27M	35M	53M	70M
External diameters (IDU)	Liquid	mm / inch	Φ6,35 - 1/4"	Φ6,35 - 1/4"	Φ6,35 - 1/4"	Φ6,35 - 1/4"	Φ9,52 - 3/8"
	Gas	mm / inch	Φ9,52 - 3/8"	Φ9,52 - 3/8"	Φ9,52 - 3/8"	Φ12,7 - 1/2"	Φ15,9 - 5/8"

# SCHIARA 2 27M ÷ 35M

MULTI Split

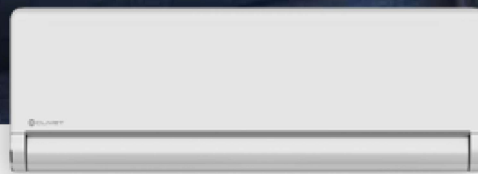

## Hiwall indoor unit for MULTI Split systems

### WHY CHOOSE SCHIARA 2?

- ✓ Smart management as standard: via smartphone with the NetHome Plus App and voice control setup with Amazon Alexa and Google Assistant.
- ✓ Purification filter: active against odours, dust, VOC, pollen, spores, bacteria and virus
- ✓ Extremely wide air distribution thank to the 180° motorized louver rotation
- ✓ SINGLESplit/MULTISplit compatible

#### 180° LOUVER

Horizontal louver can rotate with a 180° angle, bigger than a standard unit.



#### PURIFICATION FILTER

Clean the air from smells, dangerous gas (VOC), microbes (bacteria, virus, spores) and other particles.



#### CASCADE

Quick cooling function that let the horizontal louver rotate automatically



## COMFORT



Stepless Indoor Fan Speed



Anti-cold air



Multidirectional Airflow



180° louver



Cascade

## RELIABILITY



Self-diagnosis Function



Auto Defrosting

## CONVENIENCE



WiFi Control



Single/Multi Compatible



Auto-restart



0,5°C Temperature Regulation



Voice control compatible

## ENERGY SAVING



Sleep

## HEALTH



High Density filter



Purification filter



Wi-Fi NWMX (standard)

REMOTE CONTROL RG10X1-G2HS-BGEF (standard)

IE2-Y

## technical data

Indoor unit			IE2-Y	27M	35M
Code				87012283	89092266
Cooling capacity	Nominal		Btu/h	9.000	12.000
			kW	2,6	3,5
Heating capacity	Nominal		Btu/h	10.000	13.000
			kW	2,9	3,8
Dimensions	Unit	L x D x H	mm	920x211x321	920x211x321
	Packaging	L x D x H	mm	1005x385x295	1005x385x295
System weight	Unit/Packaging		kg	11,30/14,16	11,30/14,16
Air filter	Type			PUF	
Airflow			m <sup>3</sup> /h	700/515/425	700/515/425
Sound power			dB(A)	53	53
Sound pressure level			dB(A)	40/32,5/21,5	40/32,5/21,5
Operating Voltage Range	Cooling	Indoor T	°C	16~32	
	Heating	Indoor T	°C	0~30	
Refrigerant piping	External diameters	Liquid-Gas	mm	Φ6,35 - Φ9,52	Φ6,35 - Φ9,52
			inch.	1/4" - 3/8"	1/4" - 3/8"
Control system	Infrared remote control			RG10X1-G2HS-BGEF	
	Settable temperature		°C	16~30	
Power supply	Voltage/Frequency/Phases		V/Hz/n°	230 / 50 / 1	

Fan speed: HI=Hight; Mid=Medium; Lo=Low; SI=Silent  
PUF= Purificator

Test conditions:

according to EN14511 / EN12102

Cooling: indoor air temperature 27°C DB/19°C WB; outdoor air temperature 35°C DB/24°C WB;  
Heating: indoor air temperature 20°C DB/15°C WB; outdoor air temperature 7°C DB/6°C WB.  
Data declared according to UE 626/2011 delegated regulation

MULTI Split




## accessories

### Standard

<b>RG10X1-G2HS-BGEF</b>	Wireless remote controller for SCHIARA 2 indoor units
<b>NWMX</b>	Wi-fi kit for indoor units

# CRISTALLO 20M ÷ 70M

MULTI Split

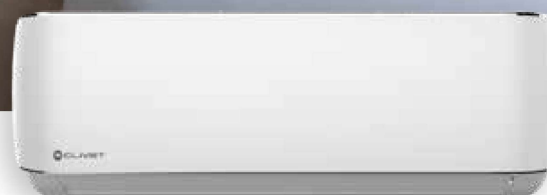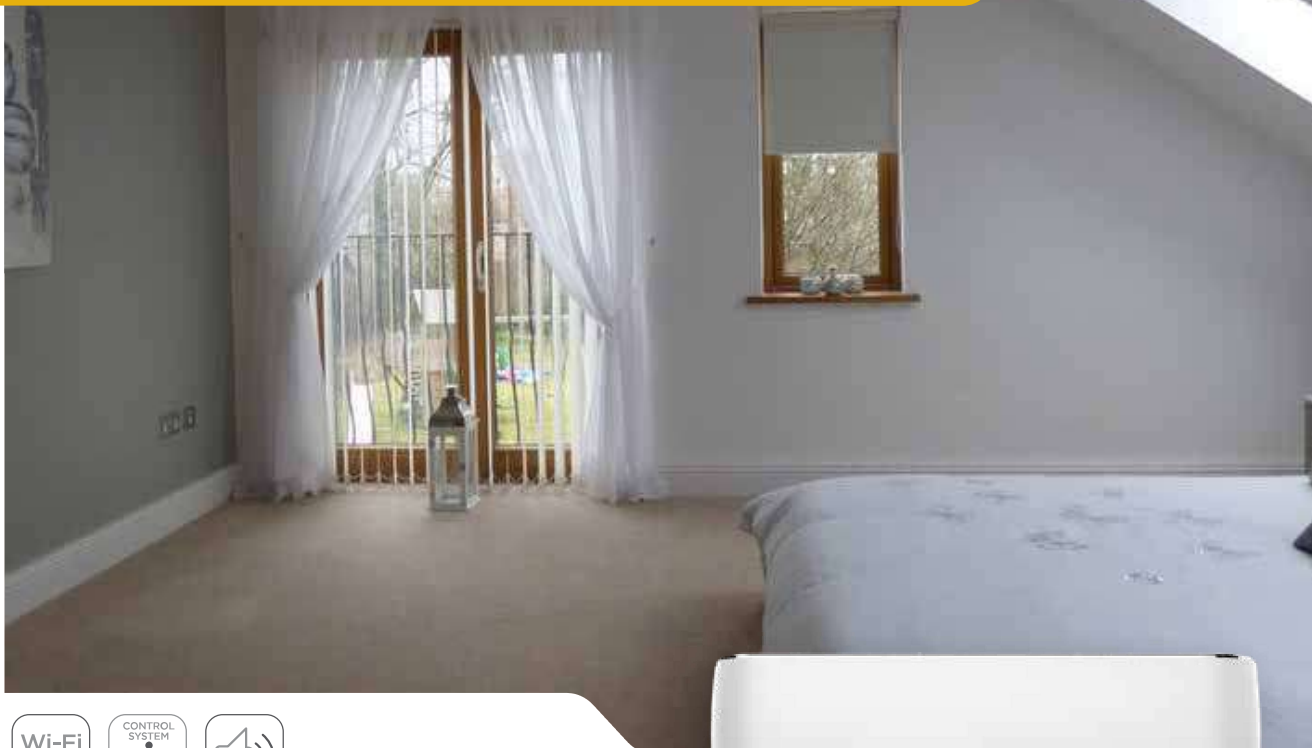

## Hiwall indoor unit for MULTI Split systems

### WHY CHOOSE CRISTALLO?

- ✓ Smart management as standard: via smartphone with the NetHome Plus App and voice control setup with Amazon Alexa and Google Assistant.
- ✓ Clean, rounded and elegant design
- ✓ SINGLESplit/MULTISplit compatible

#### MULTIDIRECTIONAL AIRFLOW

The air conditioning unit can channel the air flow in different directions to better direct the flow inside the environment



#### VOICE CONTROL



## COMFORT



12 Indoor Fan Speeds Levels



Anti-cold air



Multidirectional Airflow



Self-diagnosis Auto Defrosting Function



## CONVENIENCE



WiFi Control



Single/Multi Compatible



Auto-restart



Voice control compatible

## ENERGY SAVING



Sleep

## HEALTH



High Density filter



Cold Catalyst filter

## OPTIONAL



Wired controller




Centralised control



BMS Communication



Remote ON/OFF

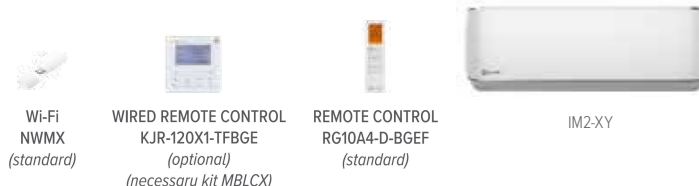

Wi-Fi NWMX (standard)

WIRED REMOTE CONTROL KJR-120X1-TFBGE (optional) (necessary kit MBLCX)

REMOTE CONTROL RG10A4-D-BGEF (standard)

IM2-XY

## technical data

Indoor unit			IM2-XY	20M*	27M	35M	53M	70M
Code				89122262	89102292	88052293	87032222	88072296
Cooling capacity	Nominal		Btu/h	8.000	9.000	12.000	18.000	24.000
			kW	2,3	2,6	3,5	5,3	7,0
Heating capacity	Nominal		Btu/h	9.000	9.500	13.000	19.000	25.000
			kW	2,6	2,8	3,8	5,6	7,3
Dimensions	Unit	L x D x H	mm	722x187x290	722x187x290	802x189x297	965x215x319	1080x226x335
	Packaging	L x D x H	mm	790x270x370	790x270x370	875x285x375	1045x305x410	1155x415x320
System weight	Unit/Packaging		kg	7,3/9,7	7,3/9,7	8,6/11,1	10,9/14,2	13,7/17,3
Air filter	Type					CCF		
Airflow			m <sup>3</sup> /h	416/309/230	416/309/230	584/477/395	730/500/420	1020/830/640
Sound power			dB(A)	54	54	56	58	63
Sound pressure level			dB(A)	8,6/7,1/4,3	8,6/7,1/4,3	8,5/7,6/4,9	12,1/8,3/7,0	17,0/13,8/10,6
Operating Voltage Range	Cooling	Indoor T	°C			17~32		
	Heating	Indoor T	°C			0~30		
Refrigerant piping	External diameters	Liquid-Gas	mm	Φ6,35 - Φ9,52	Φ6,35 - Φ9,52	Φ6,35 - Φ9,52	Φ6,35 - Φ12,7	Φ9,52 - Φ15,9
			inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Control system	Infrared remote control					RG10A4-D-BGEF		
	Settable temperature		°C			17~30		
Power supply	Voltage/Frequency/Phases		V/Hz/n°			230 / 50 / 1		

Fan speed:  
i=High; Mid=Medium; Lo=Low; Si=Silent  
CCF = Cold Catalyst

Test conditions:  
according to EN14511 / EN12102  
Cooling: indoor air temperature 27°C DB/19°C WB; outdoor air temperature 35°C DB/24°C WB;  
Heating: indoor air temperature 20°C DB/15°C WB; outdoor air temperature 7°C DB/6°C WB.  
Data declared according to UE 626/2011 delegated regulation

\* TO EXHAUSTION

## accessories

### Standard

<b>RG10A4-D-BGEF</b>	Infrared remote control for CRISTALLO / ESSENTIAL 2 indoor units
<b>NWMX</b>	Wi-fi kit for indoor units

### Optionals

<b>MKSSX</b>	Multifunction board providing remote ON/OFF and XYE port (required for connection of single unit wired control, central wired control, Data Converter, Gateway BMS) <i>Only one function among ON-OFF/Alarm/XYE/Wi-Fi can be used simultaneously</i>
<b>Control Systems</b>	(see dedicated section)



# ESSENTIAL 2 20M ÷ 70M

TO EXHAUSTION

MULTI Split



## Hiwall indoor unit for MULTI Split systems

### WHY CHOOSE ESSENTIAL 2?

- ✓ Silent Mode
- ✓ Can operate in cooling mode even at low outdoor temperatures
- ✓ SINGLESplit/MULTISplit compatible

### FOLLOW-ME



1

1. Standard temperature sensor
2. Temperature sensor can be activated

## COMFORT



12 Indoor Fan Speeds Levels



Anti-cold air



Multidirectional Airflow



Self-diagnosis Function



Auto Defrosting

## CONVENIENCE



Manual ON/OFF



Single/Multi Compatible



Auto-restart

## ENERGY SAVING



Sleep

## HEALTH



High Density filter



Cold Catalyst filter



REMOTE CONTROL  
RG10A4-D-BGEF  
(standard)



IL3-XY

## technical data

Indoor unit			IL3-XY	20M	27M	35M	53M	70M
Code				89132205	87032258	87032253	87032255	89112248
Cooling capacity	Nominal		Btu/h	8000	9.000	12.000	18.000	24.000
			kW	2,3	2,6	3,5	5,3	7,0
Heating capacity	Nominal		Btu/h	9000	9.500	13.000	19.000	25.000
			kW	2,6	2,8	3,8	5,6	7,3
Dimensions	Unit	L x D x H	mm	722x187x290	722x187x290	802x189x297	965x215x319	1080x226x335
	Packaging	L x D x H	mm	790x270x370	790x270x370	875x285x375	1045x305x410	1155x415x320
System weight	Unit/Packaging		kg	7,3/9,7	7,3/9,7	8,6/11,1	10,9/14,2	13,7/17,3
Air filter	Type					CCF		
Airflow			m <sup>3</sup> /h	416/309/230	416/309/230	584/477/395	730/500/420	1020/830/640
Sound power			dB(A)	54	54	56	58	63
Sound pressure level			dB(A)	8,6/7,1/4,3	8,6/7,1/4,3	8,5/7,6/4,9	12,1/8,3/7,0	17,0/13,8/10,6
Operating Voltage Range	Cooling	Indoor T	°C				17°-32	
	Heating	Indoor T	°C				0°-30	
Refrigerant piping	External diameters	Liquid-Gas	mm	Φ6,35 - Φ9,52	Φ6,35 - Φ9,52	Φ6,35 - Φ9,52	Φ6,35 - Φ12,7	Φ9,52 - Φ15,9
			inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Control system	Infrared remote control		-			RG10A4-D-BGEF		
	Settable temperature		°C			17°-30		
Power supply	Voltage/Frequency/Phases		V/Hz/n°			230 / 50 / 1		

Fan speed:  
i=High; M=Medium; L=Low; S=Silent  
CCF = Cold Catalyst

Test conditions:  
according to EN14511 / EN12102  
Cooling: indoor air temperature 27°C DB/19°C WB; outdoor air temperature 35°C DB/24°C WB;  
Heating: indoor air temperature 20°C DB/15°C WB; outdoor air temperature 7°C DB/6°C WB.  
Data declared according to UE 626/2011 delegated regulation

MULTI Split

## accessories


### Standard

#### RG10A4-D-BGEF

Infrared remote control for CRISTALLO / ESSENTIAL 2 indoor units



▶A++  
▶A+

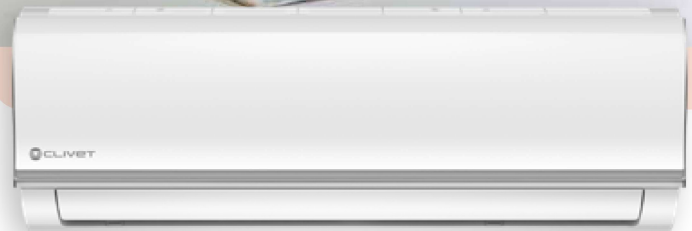

## SINGLE Split / MULTI Split reversible heat pump with Hiwall indoor unit

### WHY CHOOSE NATIV?

- ✓ Full range: SINGLE Split 9.000 ÷ 24.000 Btu/h, MULTI Split 9.000 ÷ 24.000 Btu/h
- ✓ SINGLE Split/MULTI Split compatible
- ✓ Optional: Wi-Fi for the remote management with NetHome Plus application for Android and iOS

## COMFORT



12-grades indoor Fan speed



Anti-cold air Function



Temperature compensation

## RELIABILITY



Self-diagnosis Function



Auto defrosting

## CONVENIENCE



Single/Multi Compatible



Louver Position Memory



Auto Restart Function



Automatic correction of the connection error (Multi Split)

## ENERGY SAVING



Sleep mode

## HEALTH



High Density Filter



Cold Catalyst Filter

## OPTIONAL



WIFI Control



Wi-Fi NWMX  
(optional)



REMOTE CONTROL  
RG10A-D-BGEF  
(standard)



IZ2-XY

MULTI Split

## technical data

Indoor unit				IZ2-XY	27M	35M	53M	70M
Codice articolo					89472260	89472262	89472261	89472263
Cooling capacity	Standard		Btu/h	9.000	12.000	18.000	24.000	
			kW	2,6	3,5	5,3	7,0	
Heating capacity	Standard		Btu/h	10.000	13.000	19.000	25.000	
			kW	2,9	3,8	5,6	7,3	
Dimensions	Unit	L x P x A	mm	805x194x285	805x194x285	957x213x302	1040x220x327	
	Packaging	L x P x A	mm	870x270x365	870x270x365	1035x295x385	1120x405x315	
Weight	Unit/Packaging		kg	7,5/9,7	7,5/9,7	10,0/13,0	12,3/15,8	
Air filter	Type		-			CCF		
Airflow			m <sup>3</sup> /h	520/460/340	600/500/360	840/680/540	980/817/662	
Sound power level			dB(A)	54	53	55	59	
Sound pressure level			dB(A)	40/30/26/21	40/34/26/22	44/37/30/25	44,5/42/34,5/28	
Operating range	Cooling	Indoor T.	°C			17 ~ 32		
	Heating	Indoor T.	°C			0 ~ 30		
Refrigerant piping	External diameters	Liquid-Gas	mm	Φ6,35 - Φ9,52	Φ6,35 - Φ9,52	Φ6,35 - Φ12,7	Φ9,52 - Φ15,9	
			inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"	
Control systems	Infrared remote control		-			RG10A4-D-BGEF		
	Settable temperature		°C			17 ~ 30		
Power supply	Voltage/Frequency/Phases		V/Hz/n°			230 / 50 / 1		

<sup>1</sup>SEER and SCOP data, relative energy ratings and annual energy consumption in conformity to the EN 14825 standard measurement.

CCF = Cold Catalyst

Fan speed: Hi=High; Mid=Medium; Lo=Low; Si=Silent

Test conditions:

according to EN14511/EN12102

Cooling: indoor air temperature 27°C DB/19°C WB; outdoor air temperature 35°C DB/24°C WB;

Heating: indoor air temperature 20°C DB/15°C WB; outdoor air temperature 7°C DB/6°C WB.

Data declared according to UE 626/2011 delegated regulation

## accessories

### Standard

**RG10A4-D-BGEF**

Standard Wireless remote control fo indoor units CRISTALLO / ESSENTIAL 2 / NATIV

### Optionals

Control systems

(learn more at Control System page)

# BOX 2 650x650 27M ÷ 53M

MULTISplit



## Cassette indoor unit for MULTISplit systems

### WHY CHOOSE BOX 2 650x650?

- ✓ MULTI Split/Light Commercial compatible
- ✓ Compact design for standard 60x60cm modules
- ✓ Integrated condensate discharge pump, 750 mm H<sub>2</sub>O of static pressure
- ✓ Predisposition to operate with a fresh air fraction

#### RESERVED REMOTE ON-OFF AND ALARM PORTS

Possibility to manage with an ON/OFF window contact and to activate a remote alarm (vibration, light, etc.)



#### BUILD-IN DRAIN PUMP

Available pressure:  
750 mm H<sub>2</sub>O



## COMFORT



Anti-cold air

## RELIABILITY



Self-diagnosis  
Function



Auto  
Defrosting



Condensate  
drain pump

## CONVENIENCE



Remote On/Off



Error Alarm  
Port



Auto-restart



Timer

## ENERGY SAVING



Sleep

## HEALTH



Fresh Air

## OPTIONAL



Wired  
controller



Centralised  
control



BMS  
Communication



WiFi Control



PANEL 650X650  
T-MBQ4-03B4  
(mandatory accessory)



Wi-Fi  
WF-60A1-C  
(optional)



WIRED REMOTE  
CONTROL  
KJR-120X2-TFBG-E  
(optional)



REMOTE CONTROL  
RG10A-D2S-BGEF  
(standard)



IB3-XY

## technical data

Indoor unit			IB3-XY	27M	35M	53M
Code				89112291	89102297	89102233
Cooling capacity	Nominal		Btu/h	9.000	12.000	18.000
			kW	2,6	3,5	5,3
Heating capacity	Nominal		Btu/h	10.000	14.000	18.500
			kW	2,9	4,1	5,4
Dimensions	Unit	L x D x H	mm	570x570x260	570x570x260	570x570x260
	Packaging (Unit)	L x D x H	mm	662x662x317	662x662x317	662x662x317
	Panel		mm	647x647x50	647x647x50	647x647x50
	Packaging (Panel)		mm	715x715x123	715x715x123	715x715x123
System weight	Unit / Packaging		kg	14,7/19,3	16,2/21,4	16,2/21,4
	Panel / Packaging		kg	2,5/4,5	2,5/4,5	2,5/4,5
Air filter	Type		-	R/W		
Airflow		Hi/Mid/Lo	m <sup>3</sup> /h	580/500/450	617/504/415	680/560/500
Sound power		Hi	dB(A)	53	56	56
Sound pressure level		Hi/Mid/Lo	dB(A)	38/33/29	41/37/34	44/42/41
Operating Voltage Range	Cooling	Indoor T	°C		17°-32	
	Heating	Indoor T	°C		0°-30	
Refrigerant piping	External diameters	Liquid-Gas	mm	Φ6,35 - Φ9,52	Φ6,35 - Φ9,52	Φ6,35 - Φ12,7
			inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
Control system	Infrared remote control		-		RG10A-D2S-BGEF	
	Settable temperature		°C		16°-30	
Power supply	Voltage/Frequency/Phases		V/Hz/n°		230 / 50 / 1	

R/W = Removable/Washable

Test conditions:  
according to EN14511 / EN12102  
Cooling: indoor air temperature 27°C DB/19°C WB; outdoor air temperature 35°C DB/24°C WB;  
Heating: indoor air temperature 20°C DB/15°C WB; outdoor air temperature 7°C DB/6°C WB.  
Data declared according to UE 626/2011 delegated regulation

## accessoires

### Standard

#### RG10A-D2S-BGEF

Infrared remote control for indoor units EZCool / BOX 2 / CONSOLE 3 / DUCT 2 / C&F 2

### Optionals

#### T-MBQ4-03B4

Panel for Box 2 650x650, 360° air delivery, round hole grill. (Mandatory accessory, to be selected separately)

#### WF-60A1-C

Smart port kit for the hiwall indoor unit management via Wi-Fi (it includes the adaptor and the USB key)

### Control Systems

(see dedicated section)



## Ductable indoor unit for MULTISplit systems

### WHY CHOOSE DUCT 2?

- ✓ MULTI Split/Light Commercial compatible
- ✓ Constant airflow function: the fan adapts the static pressure to the pressure drops
- ✓ Air return from the back or from below modifiable directly from the building site
- ✓ Integrated condensate discharge pump, 750 mm H<sub>2</sub>O of static pressure


#### BUILD-IN DRAIN PUMP

Available pressure:  
750 mm H<sub>2</sub>O




#### FLEXIBLE INSTALLATION

The air intake can be modified in the building site:  
air intake from rear  
air intake from bottom.

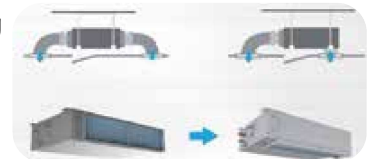

#### CONSTANT AIRFLOW CONTROL

With constant air volume control technology, optimal airflow cools every room appropriately with both short pipes and long pipes.



## COMFORT



Anti-cold air

## RELIABILITY



Self-diagnosis  
Function



Auto  
Defrosting



Condensate  
drain pump

## CONVENIENCE



Remote  
On/Off



Error Alarm  
Port



Auto-restart

## ENERGY SAVING



Sleep

## HEALTH



Fresh Air

## OPTIONAL



Wired  
controller



Centralised  
control



BMS  
Communication



WiFi Control



Wi-Fi  
WF-60A1-C  
(optional)



WIRED REMOTE  
CONTROL  
KJR-120X2-TFBG-E  
(optional)



REMOTE CONTROL  
RG10A-D2S-BGEF  
(standard)



ID3-XY

## technical data

Indoor unit			ID3-XY	27M	35M	53M	70M <sup>NEW</sup>
Code				89092235	89092219	89132211	89102201
Cooling capacity	Nominal		Btu/h	9.000	12.000	18.000	24.000
			kW	2,64	3,52	5,27	7,03
Heating capacity	Nominal		Btu/h	10.000	13.000	19.000	26.000
			kW	2,93	3,81	5,67	7,03
Dimensions	Unit	L x D x H	mm	700x450x200	700x450x200	880x674x210	1100x774x249
	Packaging	L x D x H	mm	860x540x275	860x540x275	1070x725x280	1305x805x315
System weight	Unit/Packaging		kg	18/22	18/22	24,3/29,6	32,3/39,1
Air filter	Type		-			R/W	
Airflow		Hi/Mid/Lo	m³/h	500/340/230	600/480/300	880/650/350	1229/1035/825
External static pressure		Std (Min-Max)	Pa	25 (0-60)	25 (0-60)	25 (0-100)	25 (0-160)
Sound power		Hi	dB(A)	58	59	59	62
Sound pressure level		Hi/Mid/Lo	dB(A)	40/34,5/27,5	40/34,5/27,5	41,5/38/33	49/46/41
Operating Voltage Range	Cooling	Indoor T	°C		17~32		16~32
	Heating	Indoor T	°C			0~30	
Refrigerant piping	External diameters	Liquid-Gas	mm	Φ6,35 - Φ9,52	Φ6,35 - Φ9,52	Φ6,35 - Φ12,7	Φ9,52 - Φ15,9
			inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Control system	Infrared remote control		-		RG10A-D2S-BGEF		
Power supply	Settable temperature		°C		16~30		
	Voltage/Frequency/Phases		V/Hz/n°		230 / 50 / 1		

R/W = Removable/Washable

Test conditions:

according to EN14511 / EN12102

Cooling: indoor air temperature 27°C DB/19°C WB; outdoor air temperature 35°C DB/24°C WB;

Heating: indoor air temperature 20°C DB/15°C WB; outdoor air temperature 7°C DB/6°C WB.

Data declared according to UE 626/2011 delegated regulation

## accessoires

### Standard

#### RG10A-D2S-BGEF

Infrared remote control for indoor units EZCool / BOX 2 / CONSOLE 3 / DUCT 2 / C&F 2

### Optionals

#### WF-60A1-C

Smart port kit for the hiwall indoor unit management via Wi-Fi (it includes the adaptor and the USB key)

#### Sistemi di Controllo

(vedi sezione dedicata)



# CONSOLE 3 27M ÷ 53M

NEW PRODUCT

MULTISplit



## Console indoor unit for MULTI Split Systems

### WHY CHOOSE CONSOLE 3?

- ✓ MULTI Split/Light Commercial compatible
- ✓ Compact dimensions suitable for installation under a window
- ✓ Selection of active air supply nozzles according to the situation

### SUPERSILENT


Thanks to the new double tangential fan system, noise is reduced to the lowest of its category.



### DOUBLE FLOW FOR FRONT RETURN AIR SUPPLY

Selectable air supply:

1. From the bottom and from the top
2. From the top only
3. Return air from the front

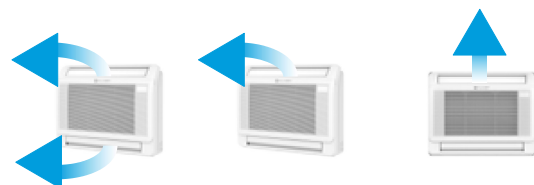

## COMFORT



Stepless  
Indoor Fan  
Speed



Anti-cold air



Temperature  
Compensation



Multidirectional  
airflow

## RELIABILITY



Self-diagnosis  
Function



Emergency  
Function

## CONVENIENCE



Remote  
On/Off



Timer



Auto-restart

## ENERGY SAVING



Sleep



Gear

## OPTIONAL



Centralised  
control



BMS  
Communication



WiFi Control

## HEALTH



High Density  
filter



Cold Catalyst  
filter




Wi-Fi  
NWMX  
(optional)



WIRED REMOTE  
CONTROL  
KJR-120X2-TFBG-E  
(optional)



REMOTE CONTROL  
RG10A-D2S-BGEF  
(standard)



IC3-Y

## technical data

Indoor unit			IC3-Y	27M	35M	53M
Code				89472268	89472266	89472269
Cooling capacity	Nominal		Btu/h	9.000	12.000	17.000
			kW	2,64	3,52	5
Heating capacity	Nominal		Btu/h	10.000	13.000	18.000
			kW	2,93	3,81	5,28
Dimensions	Unit	L x D x H	mm	794x206x621	794x206x621	794x206x621
	Packaging	L x D x H	mm	865x280x719	865x280x719	865x280x719
System weight	Unit/Packaging		kg	14,9/18,8	14,9/18,8	14,9/18,8
Air filter	Type		-	CCF	CCF	CCF
Airflow		Hi/Mid/Lo	m <sup>3</sup> /h	650/580/490	650/580/490	780/690/600
Sound power		Hi	dB(A)	54	54	55
Sound pressure level		Hi/Mid/Lo	dB(A)	37/34/27	37/34/27	41/38/32
Operating Voltage Range	Cooling	Indoor T	°C	16°32	16°32	16°32
	Heating	Indoor T	°C	0°30	0°30	0°30
Refrigerant piping	External diameters	Liquid-Gas	mm	Φ6,35 - Φ9,52	Φ6,35 - Φ9,52	Φ6,35 - Φ12,7
			inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
Control system	Infrared remote control		-		RG10A-D2S-BGEF	
	Settable temperature		°C		16°30	
Power supply	Voltage/Frequency/Phases		V/Hz/n°		230 / 50 / 1	

R/W = Removable/Washable

Test conditions:

according to EN14511 / EN12102

Cooling: indoor air temperature 27°C DB/19°C WB; outdoor air temperature 35°C DB/24°C WB;

Heating: indoor air temperature 20°C DB/15°C WB; outdoor air temperature 7°C DB/6°C WB.

Data declared according to UE 626/2011 delegated regulation

## accessoires

### Standard

#### RG10A-D2S-BGEF

Infrared remote control for indoor units EZCool / BOX 2 / CONSOLE 3 / DUCT 2 / C&F 2

### Optionals

#### NWMX

Wi-fi kit for indoor units

#### MKCX

Multifunction board providing remote ON/OFF, alarm and XYE port  
The ON-OFF/Alarm/XYE/Wi-Fi port functions can be used simultaneously

### Control systems

(see dedicated section)

# CEILING & FLOOR 2 53M

MULTISplit



## Ceiling and floor indoor unit for MULTISplit systems

### WHY CHOOSE CEILING&FLOOR 2?

- ✓ MULTI Split/Light Commercial compatible
- ✓ Vertical or horizontal, ceiling or floor installation
- ✓ Predisposition to operate with a fresh air fraction

#### SLIM DESIGN

Redesigned internal parts for durability and a slimmer chassis. The new air conditioner is slimmer and lighter than before.



#### MULTIDIRECTIONAL AIRFLOW

Vertical air flow and horizontal air flow can be adjusted by remote controller to direct air flow to every corner of the room.



## COMFORT



Anti-cold air



Multidirectional Airflow



Temperature Compensation

## RELIABILITY



Self-diagnosis Function



Auto Defrosting

## CONVENIENCE



Remote On/Off



Error Alarm Port



Auto Restart

## ENERGY SAVING



Sleep

## HEALTH



Fresh Air

## OPTIONAL



Wired controller



Centralised control



BMS Communication



WiFi Control



Wi-Fi  
WF-60A1-C  
(optional)



WIRED REMOTE CONTROL  
KJR-120X2-TFBG-E  
(optional)



REMOTE CONTROL  
RG10A-D2S-BGEF  
(standard)



IF3-XY

## technical data

Indoor unit			IF3-XY	53M
Code				89092229
Cooling capacity	Nominal		Btu/h	18.000
			kW	5,3
Heating capacity	Nominal		Btu/h	19.000
			kW	5,6
Dimensions	Unit	L x D x H	mm	1068x675x235
	Packaging	L x D x H	mm	1145x755x318
System weight	Unit/Packaging		kg	25,0/29,7
Air filter	Type		-	CCF
Airflow		Hi/Mid/Lo	m <sup>3</sup> /h	958/839/723
Sound power		Hi	dB(A)	57
Sound pressure level		Hi/Mi/Lo	dB(A)	43,5/41/36,5/24
Operating Voltage Range	Cooling	Indoor T	°C	17°-32
	Heating	Indoor T	°C	0°-30
Refrigerant piping	External diameters	Liquid-Gas	mm	Φ6,35 - Φ12,7
			inch.	1/4" - 1/2"
Control system	Infrared remote control		-	RG10A-D2S-BGEF
	Settable temperature		°C	16°-30
Power supply	Voltage/Frequency/Phases		V/Hz/n°	230 / 50 / 1

R/W = Removable/Washable

Test conditions:  
according to EN14511 / EN12102  
Cooling: indoor air temperature 27°C DB/19°C WB; outdoor air temperature 35°C DB/24°C WB;  
Heating: indoor air temperature 20°C DB/15°C WB; outdoor air temperature 7°C DB/6°C WB.  
Data declared according to UE 626/2011 delegated regulation

## accessoires

### Standard

**RG10A-D2S-BGEF** Infrared remote control for indoor units EZCool / BOX 2 / CONSOLE 3 / DUCT 2 / C&F 2

### Optionals

**WF-60A1-C** Smart port kit for the hiwall indoor unit management via Wi-Fi (it includes the adaptor and the USB key)

**Control systems** (learn more at Control System page)

# HYDRO-M 80M

MULTISplit




Unified solution for air conditioning / water heating / DHW

## WHY CHOOSE HYDRO-M?

- ✓ Smart management as standard: via smartphone with the NetHome Plus App.
- ✓ Compact and easy to install module
- ✓ Production of hot water for Heating or Domestic Hot Water (in combination with DHW boiler)
- ✓ Combination with other indoor air units
- ✓ Possibility of simultaneous operation of all indoor units in heating mode

## MANAGEMENT OF MANY PLANT ELEMENTS

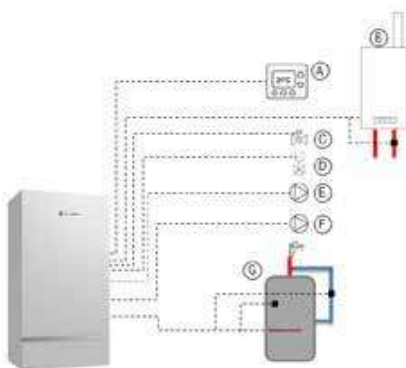

- A-zone thermostat
- B-auxiliary heat source-AHS
  - ON/OFF signal
- temperature probe TW1B
- C-2-way valve (normally closed); blocks water access to the radiant distribution system
- D-3-way valves for system / DHW switching
- E-pump secondary circuit
- F-DHW recirculation pump / mixed zone pump
- G-DHW boiler
  - electric resistance
  - temperature probe
  - DHW return probe (for recirculation)

## COMFORT



Hot Water  
(Heat/DHW)

## RELIABILITY



Auxiliary  
heating  
source



Back-up  
electrical  
heater

## CONVENIENCE



Remote  
On/Off



WiFi Control



Auto-restart

## HEALTH



Anti-  
legionella

## ENERGY SAVING



Vacances



Wi-Fi  
NWMX  
(Standard)



User interface  
KJR-120J-TFBG-E  
(Standard)



IHM1-Y

## technical data

Indoor unit		IHM1-Y		80M	
Code				89102210	
Heating capacity	Capacity	Water 35/30°C	Btu/h	27.300	
		Outdoor air -7°C	kW	8,0	
		Water 35/30°C	Btu/h	27.000	
		Outdoor air 7°C	kW	7,9	
		Water 45/40°C	Btu/h	27.300	
		Outdoor air 7°C	kW	8,0	
		Water 45/40°C	Btu/h	27.300	
Seasonal efficiency	Heating 55°C	Energy class	-	A+	
		SCOP	-	2,93	
		ηs (seasonal output)	%	114%	
	Heating 35°C	Energy class	-	A++	
		SCOP	-	4,26	
		ηs (seasonal output)	%	167%	
Dimensions	Unit	L x D x H	mm	490x325x918	
	Packaging	L x D x H	mm	570x415x1.055	
System weight	Unit/Packaging	-	kg	56/64	
Water flow		Nominal	l/s	0,38	
Pump head		Nominal	kPa	78,5	
System tank volume			l	5	
System water content		Minimum	l	30	
Back-up electrical heater	Rated DC Power	-	W	3.100	
	Current	-	TO	13,5	
Sound power		-	dB(A)	44	
Sound pressure level		-	dB(A)	32	
Water supply temperature	Heating	Min / Max	°C	25°60	
	DHW	Min / Max	°C	35°55	
Operating range (outdoor air)	Heating	Min / Max	°C	-20°24	
	DHW	Min / Max	°C	-20°43	
Refrigerant piping	Liquid-Gas	-	mm	Φ6,35 - Φ12,7	
			inch.	1/4" - 1/2"	
Water piping	Plant	mm	mm	Φ28*	
	Condensate drain	mm	mm	Φ16	
		inch.	inch.	5/8"	
Control systems	Built-in control		-	HMI	
	Voltage/Frequency/Phases		V/Hz/n°	230 / 50 / 1	

Data according to EN 14511:2018 and EN 14825:2016

2016/2281)

The product complies with the European ErP Directive (EU regulations 811/2013 - 813/2013 -

\* solder connection

## accessoires

### Standard

#### NWMX

Wi-Fi kit for indoor units

### Optionals

#### DHW boilers and accessories

See accessories section

# COMBINATION TABLES

## Outdoor unit: MU2-Y 41M (DUAL)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT		COOLING CAPACITY [KW]		TOTAL COOLING CAPACITY [KW]			ABSORBED COOLING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)					
	TO	B	TO	B	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SEER	Pd	CEA [kWh]		
MU2-Y 41M (1x1)	20M	8.000	—	2,30	—	1,23	2,00	2,90	0,30	0,62	0,77	1,30	2,68	3,34	3,25	—	—	—	—	
	27M	9.000	—	2,50	—	1,23	2,50	3,20	0,30	0,77	0,96	1,30	3,34	4,18	3,25	—	—	—	—	
	35M	12.000	—	3,50	—	1,23	3,50	3,90	0,30	1,08	1,35	1,30	4,68	5,85	3,25	—	—	—	—	
	53M	18.000	—	4,10	—	1,35	4,10	4,90	0,40	1,27	1,59	1,74	5,52	6,90	3,23	—	—	—	—	
	20M	20M	8.000	8.000	2,30	2,30	1,76	4,10	4,92	0,44	1,27	1,59	1,93	5,52	6,90	3,23	A+	6,80	4,10	211
	20M	27M	8.000	9.000	1,79	2,31	1,76	4,10	4,92	0,44	1,27	1,59	1,93	5,52	6,90	3,23	A+	6,80	4,10	211
MU2-Y 41M (1x2)	20M	35M	8.000	12.000	1,51	2,59	1,76	4,10	4,92	0,44	1,27	1,59	1,93	5,52	6,90	3,23	A+	6,80	4,10	211
	27M	27M	9.000	9.000	2,05	2,05	1,76	4,10	4,92	0,44	1,27	1,59	1,93	5,52	6,90	3,23	A+	6,80	4,10	211
	27M	35M	9.000	12.000	1,76	2,34	1,76	4,10	4,92	0,44	1,27	1,59	1,93	5,52	6,90	3,23	A+	6,80	4,10	211
	27M	35M	9.000	12.000	1,76	2,34	1,76	4,10	4,92	0,44	1,27	1,59	1,93	5,52	6,90	3,23	A+	6,80	4,10	211
	27M	35M	9.000	12.000	1,76	2,34	1,76	4,10	4,92	0,44	1,27	1,59	1,93	5,52	6,90	3,23	A+	6,80	4,10	211
	27M	35M	9.000	12.000	1,76	2,34	1,76	4,10	4,92	0,44	1,27	1,59	1,93	5,52	6,90	3,23	A+	6,80	4,10	211

Notes Pd = Pdesign CEA = Annual Energy Consumption

OUTDOOR UNIT	INDOOR UNIT		HEATING CAPACITY [KW]		TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)					
	TO	B	TO	B	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SCOP	Pd	CEA [kWh]		
MU2-Y 41M (1x1)	20M	8.000	—	2,45	—	1,32	2,50	2,82	0,28	0,67	0,83	1,22	2,90	3,62	3,75	—	—	—	—	
	27M	9.000	—	2,92	—	1,32	2,90	3,36	0,28	0,78	0,97	1,22	3,38	4,23	3,73	—	—	—	—	
	35M	12.000	—	3,75	—	1,32	3,80	4,31	0,28	1,02	1,28	1,22	4,44	5,55	3,72	—	—	—	—	
	53M	18.000	—	4,40	—	1,45	4,40	5,24	0,38	1,19	1,48	1,65	5,16	6,45	3,71	—	—	—	—	
	20M	20M	8.000	8.000	2,20	2,20	1,89	4,40	5,28	0,42	1,19	1,48	1,80	5,16	6,45	3,71	TO	4,00	3,70	1295
	20M	27M	8.000	9.000	1,93	2,48	1,89	4,40	5,28	0,42	1,19	1,48	1,80	5,16	6,45	3,71	TO	4,00	3,70	1295
MU2-Y 41M (1x2)	20M	35M	8.000	12.000	1,62	2,78	1,89	4,40	5,28	0,42	1,19	1,48	1,80	5,16	6,45	3,71	TO	4,00	3,70	1295
	27M	27M	9.000	9.000	2,20	2,20	1,89	4,40	5,28	0,42	1,19	1,48	1,80	5,16	6,45	3,71	TO	4,00	3,70	1295
	27M	35M	9.000	12.000	1,89	2,51	1,89	4,40	5,28	0,42	1,19	1,48	1,80	5,16	6,45	3,71	TO	4,00	3,70	1295
	27M	35M	9.000	12.000	1,89	2,51	1,89	4,40	5,28	0,42	1,19	1,48	1,80	5,16	6,45	3,71	TO	4,00	3,70	1295
	27M	35M	9.000	12.000	1,89	2,51	1,89	4,40	5,28	0,42	1,19	1,48	1,80	5,16	6,45	3,71	TO	4,00	3,70	1295
	27M	35M	9.000	12.000	1,89	2,51	1,89	4,40	5,28	0,42	1,19	1,48	1,80	5,16	6,45	3,71	TO	4,00	3,70	1295

Notes Pd = Pdesign CEA = Annual Energy Consumption

# COMBINATION TABLES

## Outdoor unit: MU2-Y 53M (DUAL)

OUTDOOR UNIT	INDOOR UNIT		COOLING CAPACITY [KW]		TOTAL COOLING CAPACITY [KW]			POWER INPUT COOLING [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)			
	TO	B	TO	B	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SEER	Pd	CEA [kWh]
MU2-Y 53M (1x1)	20M	—	2,30	—	1,43	2,00	2,90	0,35	0,60	0,75	1,52	2,60	3,24	3,35	—	—	—	—
	8.000	—	2,30	—	1,43	2,00	2,90	0,35	0,60	0,75	1,52	2,60	3,24	3,35	—	—	—	—
	27M	—	2,50	—	1,43	2,50	3,20	0,35	0,75	0,93	1,52	3,24	4,06	3,35	—	—	—	—
	9.000	—	2,50	—	1,43	2,50	3,20	0,35	0,75	0,93	1,52	3,24	4,06	3,35	—	—	—	—
	35M	—	3,50	—	1,43	3,50	3,90	0,35	1,08	1,29	1,52	4,68	5,62	3,25	—	—	—	—
12.000	—	3,50	—	1,43	3,50	3,90	0,35	1,08	1,29	1,52	4,68	5,62	3,25	—	—	—	—	
53M	—	5,00	—	1,64	5,00	5,51	0,45	1,55	1,89	1,96	6,73	8,20	3,23	—	—	—	—	
18.000	—	5,00	—	1,64	5,00	5,51	0,45	1,55	1,89	1,96	6,73	8,20	3,23	—	—	—	—	
MU2-Y 53M (1x2)	20M	20M	2,30	2,30	2,12	5,00	5,62	0,54	1,47	2,05	2,35	6,38	8,92	3,41	A+	6,10	5,30	304
	8.000	8.000	2,30	2,30	2,12	5,00	5,62	0,54	1,47	2,05	2,35	6,38	8,92	3,41	A+	6,10	5,30	304
	20M	27M	2,19	2,81	2,12	5,00	5,83	0,54	1,55	2,05	2,35	6,73	8,92	3,23	A+	6,10	5,30	304
	8.000	9.000	2,19	2,81	2,12	5,00	5,83	0,54	1,55	2,05	2,35	6,73	8,92	3,23	A+	6,10	5,30	304
	20M	35M	1,84	3,16	2,12	5,00	6,41	0,54	1,55	2,05	2,35	6,73	8,92	3,23	A+	6,10	5,30	304
	8.000	12.000	1,84	3,16	2,12	5,00	6,41	0,54	1,55	2,05	2,35	6,73	8,92	3,23	A+	6,10	5,30	304
	20M	53M	1,40	3,63	2,12	5,00	6,47	0,54	1,54	2,05	2,35	6,69	8,92	3,25	A+	6,10	5,30	304
	8.000	18.000	1,40	3,63	2,12	5,00	6,47	0,54	1,54	2,05	2,35	6,69	8,92	3,25	A+	6,10	5,30	304
	27M	27M	<b>2,65</b>	<b>2,65</b>	<b>2,12</b>	<b>5,30</b>	<b>6,41</b>	<b>0,54</b>	<b>1,64</b>	<b>2,05</b>	<b>2,35</b>	<b>7,13</b>	<b>8,92</b>	<b>3,23</b>	<b>A+</b>	<b>6,10</b>	<b>5,30</b>	<b>304</b>
	9.000	9.000	<b>2,65</b>	<b>2,65</b>	<b>2,12</b>	<b>5,30</b>	<b>6,41</b>	<b>0,54</b>	<b>1,64</b>	<b>2,05</b>	<b>2,35</b>	<b>7,13</b>	<b>8,92</b>	<b>3,23</b>	<b>A+</b>	<b>6,10</b>	<b>5,30</b>	<b>304</b>
	27M	35M	2,27	3,03	2,12	5,30	6,41	0,54	1,64	2,05	2,35	7,13	8,92	3,23	A+	6,10	5,30	304
	9.000	12.000	2,27	3,03	2,12	5,30	6,41	0,54	1,64	2,05	2,35	7,13	8,92	3,23	A+	6,10	5,30	304
27M	53M	1,77	3,53	2,12	5,30	6,47	0,54	1,64	2,05	2,35	7,13	8,92	3,23	A+	6,10	5,30	304	
9.000	18.000	1,77	3,53	2,12	5,30	6,47	0,54	1,64	2,05	2,35	7,13	8,92	3,23	A+	6,10	5,30	304	
35M	35M	2,65	2,65	2,12	5,30	6,41	0,54	1,64	2,05	2,35	7,13	8,92	3,23	A+	6,10	5,30	304	
12.000	12.000	2,65	2,65	2,12	5,30	6,41	0,54	1,64	2,05	2,35	7,13	8,92	3,23	A+	6,10	5,30	304	

Notes Pd = Pdesign CEA = Annual Energy Consumption

MULTISplit

OUTDOOR UNIT	INDOOR UNIT		HEATING CAPACITY [KW]		TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)			
	TO	B	TO	B	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SCOP	Pd	CEA [kWh]
MU2-Y 53M (1x1)	20M	—	2,45	—	1,56	2,50	3,03	0,32	0,67	0,83	1,39	2,90	3,62	3,75	—	—	—	—
	8.000	—	2,45	—	1,56	2,50	3,03	0,32	0,67	0,83	1,39	2,90	3,62	3,75	—	—	—	—
	27M	—	3,00	—	1,56	3,00	3,63	0,32	0,80	1,00	1,39	3,48	4,35	3,75	—	—	—	—
	9.000	—	3,00	—	1,56	3,00	3,63	0,32	0,80	1,00	1,39	3,48	4,35	3,75	—	—	—	—
	35M	—	3,80	—	1,56	3,80	4,60	0,32	1,00	1,20	1,39	4,34	5,20	3,81	—	—	—	—
12.000	—	3,80	—	1,56	3,80	4,60	0,32	1,00	1,20	1,39	4,34	5,20	3,81	—	—	—	—	
53M	—	5,20	—	1,73	5,20	5,79	0,42	1,35	1,88	1,83	5,87	8,16	3,85	—	—	—	—	
18.000	—	5,20	—	1,73	5,20	5,79	0,42	1,35	1,88	1,83	5,87	8,16	3,85	—	—	—	—	
MU2-Y 53M (1x2)	20M	20M	2,50	2,50	2,23	5,00	6,04	0,51	1,35	1,88	2,22	5,86	8,16	3,71	TO	4,00	4,30	1505
	8.000	8.000	2,50	2,50	2,23	5,00	6,04	0,51	1,35	1,88	2,22	5,86	8,16	3,71	TO	4,00	4,30	1505
	20M	27M	2,32	2,98	2,23	5,30	6,13	0,51	1,43	1,88	2,22	6,21	8,16	3,71	TO	4,00	4,30	1505
	8.000	9.000	2,32	2,98	2,23	5,30	6,13	0,51	1,43	1,88	2,22	6,21	8,16	3,71	TO	4,00	4,30	1505
	20M	35M	2,03	3,47	2,23	5,50	6,36	0,51	1,48	1,88	2,22	6,45	8,16	3,71	TO	4,00	4,30	1505
	8.000	12.000	2,03	3,47	2,23	5,50	6,36	0,51	1,48	1,88	2,22	6,45	8,16	3,71	TO	4,00	4,30	1505
	20M	53M	1,60	4,14	2,23	5,70	6,60	0,51	1,54	1,88	2,22	6,68	8,16	3,71	TO	4,00	4,30	1505
	8.000	18.000	1,60	4,14	2,23	5,70	6,60	0,51	1,54	1,88	2,22	6,68	8,16	3,71	TO	4,00	4,30	1505
	27M	27M	<b>2,79</b>	<b>2,79</b>	<b>2,23</b>	<b>5,57</b>	<b>6,68</b>	<b>0,51</b>	<b>1,50</b>	<b>1,88</b>	<b>2,22</b>	<b>6,53</b>	<b>8,16</b>	<b>3,71</b>	<b>TO</b>	<b>4,00</b>	<b>4,30</b>	<b>1505</b>
	9.000	9.000	<b>2,79</b>	<b>2,79</b>	<b>2,23</b>	<b>5,57</b>	<b>6,68</b>	<b>0,51</b>	<b>1,50</b>	<b>1,88</b>	<b>2,22</b>	<b>6,53</b>	<b>8,16</b>	<b>3,71</b>	<b>TO</b>	<b>4,00</b>	<b>4,30</b>	<b>1505</b>
	27M	35M	2,39	3,18	2,23	5,57	6,68	0,51	1,50	1,88	2,22	6,53	8,16	3,71	TO	4,00	4,30	1505
	9.000	12.000	2,39	3,18	2,23	5,57	6,68	0,51	1,50	1,88	2,22	6,53	8,16	3,71	TO	4,00	4,30	1505
27M	53M	1,86	3,71	2,23	5,57	6,68	0,51	1,50	1,88	2,22	6,53	8,16	3,71	TO	4,00	4,30	1505	
9.000	18.000	1,86	3,71	2,23	5,57	6,68	0,51	1,50	1,88	2,22	6,53	8,16	3,71	TO	4,00	4,30	1505	
35M	35M	2,79	2,79	2,23	5,57	6,68	0,51	1,50	1,88	2,22	6,53	8,16	3,71	TO	4,00	4,30	1505	
12.000	12.000	2,79	2,79	2,23	5,57	6,68	0,51	1,50	1,88	2,22	6,53	8,16	3,71	TO	4,00	4,30	1505	

Notes Pd = Pdesign CEA = Annual Energy Consumption



# COMBINATION TABLES

## Outdoor unit: MU2-Y 61M (TRIPLE)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT			COOLING CAPACITY [KW]			TOTAL COOLING CAPACITY [KW]		POWER INPUT COOLING [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)					
	TO	B	C	TO	B	C	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.		Max.	Class	SEER	Pd	CEA [kWh]	
MU2-Y 61M (1x1)	20M 8.000	—	—	2,30	—	—	1,46	2,00	2,90	0,38	0,62	0,77	1,65	2,69	3,37	3,23	—	—	—	—	
	27M 9.000	—	—	2,50	—	—	1,46	2,50	3,20	0,38	0,77	0,97	1,65	3,37	4,21	3,23	—	—	—	—	
	35M 12.000	—	—	3,50	—	—	1,46	3,50	3,90	0,38	1,08	1,30	1,65	4,71	5,65	3,23	—	—	—	—	
	53M 18.000	—	—	5,00	—	—	1,67	5,00	6,50	0,48	1,55	1,78	2,09	6,73	7,74	3,23	—	—	—	—	
	20M 8.000	20M 8.000	—	2,30	2,30	—	2,05	4,20	5,58	0,58	1,30	1,92	2,50	5,65	8,35	3,23	A+	5,60	4,20	263	
MU2-Y 61M (1x2)	20M 8.000	27M 9.000	—	2,06	2,64	—	2,05	4,70	5,89	0,58	1,46	2,02	2,50	6,33	8,76	3,23	A+	5,60	4,70	294	
	20M 8.000	35M 12.000	—	1,95	3,35	—	2,05	5,30	6,20	0,58	1,64	2,11	2,50	7,13	9,18	3,23	A+	5,60	5,30	331	
	20M 8.000	53M 18.000	—	1,76	4,54	—	2,05	6,30	6,94	0,58	1,95	2,21	2,50	8,48	9,60	3,23	A+	5,60	6,10	381	
	27M 9.000	27M 9.000	—	2,65	2,65	—	2,05	5,30	6,51	0,58	1,64	2,11	2,50	7,13	9,18	3,23	A+	5,60	5,30	331	
	27M 9.000	35M 12.000	—	2,57	3,43	—	2,05	6,00	6,70	0,58	1,86	2,15	2,50	8,08	9,35	3,23	A+	5,60	6,00	375	
	27M 9.000	53M 18.000	—	2,10	4,20	—	2,05	6,30	6,94	0,58	1,94	2,21	2,50	8,45	9,60	3,24	A+	5,60	6,10	381	
	35M 12.000	35M 12.000	—	3,10	3,10	—	2,05	6,20	6,94	0,58	1,92	2,21	2,50	8,35	9,60	3,23	A+	5,60	6,10	381	
	MU2-Y 61M (1x3)	20M 8.000	20M 8.000	20M 8.000	2,30	2,30	2,30	2,48	6,20	7,32	0,69	1,92	2,40	3,00	8,35	10,43	3,23	A++	6,50	6,10	328
		20M 8.000	20M 8.000	27M 9.000	1,89	1,89	2,43	2,48	6,20	7,38	0,69	1,92	2,40	3,00	8,35	10,43	3,23	A++	6,50	6,10	328
		20M 8.000	20M 8.000	35M 12.000	1,67	1,67	2,86	2,48	6,20	7,44	0,69	1,92	2,40	3,00	8,35	10,43	3,23	A++	6,50	6,10	328
20M 8.000		27M 9.000	27M 9.000	1,74	2,23	2,23	2,48	6,20	7,44	0,69	1,92	2,40	3,00	8,35	10,43	3,23	A++	6,50	6,10	328	
20M 8.000		27M 9.000	35M 12.000	1,55	1,99	2,66	2,48	6,20	7,44	0,69	1,92	2,40	3,00	8,35	10,43	3,23	A++	6,50	6,10	328	
27M 9.000		27M 9.000	27M 9.000	2,07	2,07	2,07	2,48	6,20	7,44	0,69	1,92	2,40	3,00	8,35	10,43	3,23	A++	6,50	6,10	328	
27M 9.000		27M 9.000	35M 12.000	1,86	1,86	2,48	2,48	6,20	7,44	0,69	1,92	2,40	3,00	8,35	10,43	3,23	A++	6,50	6,10	328	

Notes Pd = Pdesign CEA = Annual Energy Consumption

# COMBINATION TABLES

## Outdoor unit: MU2-Y 61M (TRIPLE)

OUTDOOR UNIT	INDOOR UNIT			HEATING CAPACITY [KW]			TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	TO	B	C	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SCOP	Pd	CEA [kWh]
MU2-Y 61M (1x1)	20M 8.000	—	—	2,50	—	—	1,46	2,50	3,03	0,35	0,67	0,84	1,52	2,93	3,66	3,71	—	—	—	—
	27M 9.000	—	—	3,00	—	—	1,46	3,00	3,63	0,35	0,81	1,01	1,52	3,52	4,39	3,71	—	—	—	—
	35M 12.000	—	—	3,80	—	—	1,46	3,80	4,60	0,35	1,02	1,23	1,52	4,45	5,34	3,71	—	—	—	—
	53M 18.000	—	—	5,20	—	—	1,74	5,20	6,63	0,45	1,40	2,00	1,96	6,09	8,68	3,71	—	—	—	—
	20M 8.000	20M 8.000	—	2,50	2,50	—	2,13	5,00	5,80	0,52	1,35	1,74	2,26	5,86	7,55	3,71	TO	3,80	4,00	1474
MU2-Y 61M (1x2)	20M 8.000	20M 9.000	—	2,45	3,15	—	2,13	5,60	6,12	0,52	1,51	1,82	2,26	6,56	7,92	3,71	TO	3,80	4,48	1651
	20M 8.000	35M 12.000	—	2,17	3,73	—	2,13	5,90	6,44	0,52	1,59	1,91	2,26	6,91	8,30	3,71	TO	3,80	4,80	1768
	20M 8.000	53M 18.000	—	1,82	4,68	—	2,13	6,50	7,21	0,52	1,75	2,00	2,26	7,62	8,68	3,71	A+	3,80	5,12	1886
	27M 9.000	27M 9.000	—	2,95	2,95	—	2,13	5,90	6,76	0,52	1,59	1,91	2,26	6,91	8,30	3,71	TO	3,80	4,80	1768
	27M 9.000	35M 12.000	—	2,70	3,60	—	2,13	6,30	6,96	0,52	1,70	1,94	2,26	7,38	8,45	3,71	A+	3,80	5,12	1886
	27M 9.000	53M 18.000	—	2,20	4,40	—	2,13	6,60	7,21	0,52	1,78	2,00	2,26	7,73	8,68	3,71	A+	3,80	5,12	1886
	35M 12.000	35M 12.000	—	3,15	3,15	—	2,13	6,30	7,21	0,52	1,70	2,00	2,26	7,38	8,68	3,71	A+	3,80	5,12	1886
	20M 8.000	20M 8.000	20M 8.000	2,15	2,15	2,15	2,25	6,44	7,60	0,62	1,74	2,17	2,72	7,55	9,43	3,71	A+	4,00	5,40	1890
	20M 8.000	20M 8.000	27M 9.000	1,96	1,96	2,52	2,25	6,44	7,60	0,62	1,74	2,17	2,72	7,55	9,43	3,71	A+	4,00	5,40	1890
	20M 8.000	20M 8.000	35M 12.000	1,73	1,73	2,97	2,25	6,44	7,73	0,62	1,74	2,17	2,72	7,55	9,43	3,71	A+	4,00	5,40	1890
MU2-Y 61M (1x3)	20M 8.000	27M 9.000	27M 9.000	1,80	2,32	2,32	2,25	6,44	7,73	0,62	1,74	2,17	2,72	7,55	9,43	3,71	A+	4,00	5,40	1890
	20M 8.000	27M 9.000	35M 12.000	1,61	2,07	2,76	2,25	6,44	7,73	0,62	1,74	2,17	2,72	7,55	9,43	3,71	A+	4,00	5,40	1890
	27M 9.000	27M 9.000	27M 9.000	2,15	2,15	2,15	2,25	6,44	7,73	0,62	1,74	2,17	2,72	7,55	9,43	3,71	A+	4,00	5,40	1890
	27M 9.000	27M 9.000	35M 12.000	1,93	1,93	2,58	2,25	6,44	7,73	0,62	1,74	2,17	2,72	7,55	9,43	3,71	A+	4,00	5,40	1890

Notes Pd = Pdesign CEA = Annual Energy Consumption

MULTISplit

# COMBINATION TABLES

## Outdoor unit: MU2-Y 79M (TRIPLE)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT			COOLING CAPACITY [KW]			TOTAL COOLING CAPACITY [KW]			POWER INPUT COOLING [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	TO	B	C	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SEER	Pd	CEA [kWh]
MU2-Y79M (1x1)	20M 8.000	—	—	2,30	—	—	1,58	2,00	2,90	0,40	0,62	0,77	1,74	2,69	3,37	3,23	—	—	—	—
	27M 9.000	—	—	2,50	—	—	1,58	2,50	3,20	0,40	0,77	0,97	1,74	3,37	4,21	3,23	—	—	—	—
	35M 12.000	—	—	3,50	—	—	1,58	3,50	3,90	0,40	1,08	1,30	1,74	4,71	5,65	3,23	—	—	—	—
	53M 18.000	—	—	5,00	—	—	1,78	5,00	6,50	0,50	1,55	1,78	2,17	6,73	7,74	3,23	—	—	—	—
	20M 8.000	20M 8.000	—	2,10	2,10	—	2,21	4,20	6,32	0,64	1,30	2,08	2,76	5,65	9,04	3,23	A+	5,60	4,20	263
MU2-Y79M (1x2)	20M 8.000	27M 9.000	—	2,36	2,64	—	2,21	4,70	6,72	0,64	1,46	2,20	2,76	6,33	9,57	3,23	A+	5,60	4,70	294
	20M 8.000	35M 12.000	—	1,95	3,35	—	2,21	5,30	7,11	0,64	1,64	2,45	2,76	7,13	10,63	3,23	A+	5,60	5,30	331
	20M 8.000	53M 18.000	—	1,82	4,68	—	2,21	6,50	7,90	0,64	2,01	2,69	2,76	8,75	11,70	3,23	A+	5,60	6,50	406
	27M 9.000	27M 9.000	—	2,65	2,65	—	2,21	5,30	7,11	0,64	1,64	2,45	2,76	7,13	10,63	3,23	A+	5,60	5,30	331
	27M 9.000	35M 12.000	—	2,57	3,43	—	2,21	6,00	7,51	0,64	1,86	2,57	2,76	8,08	11,17	3,23	A+	5,60	6,00	375
	27M 9.000	53M 18.000	—	2,27	4,53	—	2,21	6,80	7,90	0,64	2,09	2,69	2,76	9,10	11,70	3,25	A+	5,60	6,80	425
	35M 12.000	35M 12.000	—	3,15	3,15	—	2,21	6,30	7,66	0,64	1,94	2,64	2,76	8,45	11,48	3,24	A+	5,60	6,30	394
	35M 12.000	53M 18.000	—	2,72	4,08	—	2,21	6,80	7,90	0,64	2,09	2,69	2,76	9,10	11,70	3,25	A+	5,60	6,80	425
	20M 8.000	20M 8.000	20M 8.000	2,30	2,30	2,30	2,77	7,30	8,69	0,76	2,26	2,91	3,30	9,83	12,65	3,23	A++	6,10	7,90	453
	20M 8.000	20M 8.000	27M 9.000	2,25	2,25	2,90	2,77	7,40	8,69	0,76	2,29	2,91	3,30	9,96	12,65	3,23	A++	6,10	7,90	453
	20M 8.000	20M 8.000	35M 12.000	2,13	2,13	3,65	2,77	7,90	8,69	0,76	2,45	2,91	3,30	10,63	12,65	3,23	A++	6,10	7,90	453
	20M 8.000	20M 8.000	53M 18.000	1,73	1,73	4,44	2,77	7,90	8,69	0,76	2,45	2,91	3,30	10,63	12,65	3,23	A++	6,10	7,90	453
20M 8.000	27M 9.000	27M 9.000	2,13	2,74	2,74	2,77	7,60	8,69	0,76	2,35	2,91	3,30	10,23	12,65	3,23	A++	6,10	7,90	453	
20M 8.000	27M 9.000	35M 12.000	1,98	2,54	3,39	2,77	7,90	8,69	0,76	2,45	2,91	3,30	10,63	12,65	3,23	A++	6,10	7,90	453	
20M 8.000	27M 9.000	53M 18.000	1,63	2,39	4,18	2,77	7,90	8,69	0,76	2,45	2,91	3,30	10,63	12,65	3,23	A++	6,10	7,90	453	
20M 8.000	35M 12.000	35M 12.000	1,78	3,06	3,06	2,77	7,90	8,69	0,76	2,45	2,91	3,30	10,63	12,65	3,23	A++	6,10	7,90	453	
27M 9.000	27M 9.000	27M 9.000	<b>2,63</b>	<b>2,63</b>	<b>2,63</b>	<b>2,77</b>	<b>7,90</b>	<b>8,69</b>	<b>0,76</b>	<b>2,45</b>	<b>2,91</b>	<b>3,30</b>	<b>10,63</b>	<b>12,65</b>	<b>3,23</b>	<b>A++</b>	<b>6,10</b>	<b>7,90</b>	<b>453</b>	
27M 9.000	27M 9.000	35M 12.000	2,37	2,37	3,16	2,77	7,90	8,69	0,76	2,45	2,91	3,30	10,63	12,65	3,23	A++	6,10	7,90	453	
27M 9.000	35M 12.000	35M 12.000	2,15	2,87	2,87	2,77	7,90	8,69	0,76	2,45	2,91	3,30	10,63	12,65	3,23	A++	6,10	7,90	453	
35M 12.000	35M 12.000	35M 12.000	2,63	2,63	2,63	2,77	7,90	8,69	0,76	2,45	2,91	3,30	10,63	12,65	3,23	A++	6,10	7,90	453	

Notes Pd = Pdesign CEA = Annual Energy Consumption

# COMBINATION TABLES

Outdoor unit: MU2-Y 79M (TRIPLE)

OUTDOOR UNIT	INDOOR UNIT			HEATING CAPACITY [KW]			TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	TO	B	C	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SCOP	Pd	CEA [kWh]
MU2-Y 79M (1x1)	20M	—	—	2,50	—	—	1,64	2,50	2,90	0,40	0,67	0,84	1,74	2,91	3,64	3,73	—	—	—	—
	8.000	—	—	2,50	—	—	1,64	2,50	2,90	0,40	0,67	0,84	1,74	2,91	3,64	3,73	—	—	—	—
	27M	—	—	3,00	—	—	1,64	3,00	3,20	0,40	0,80	1,01	1,74	3,50	4,37	3,73	—	—	—	—
	9.000	—	—	3,00	—	—	1,64	3,00	3,20	0,40	0,80	1,01	1,74	3,50	4,37	3,73	—	—	—	—
	35M	—	—	3,80	—	—	1,64	3,80	3,90	0,40	1,02	1,22	1,74	4,43	5,32	3,73	—	—	—	—
	12.000	—	—	3,80	—	—	1,64	3,80	3,90	0,40	1,02	1,22	1,74	4,43	5,32	3,73	—	—	—	—
MU2-Y 79M (1x2)	53M	—	—	5,20	—	—	1,89	5,20	7,22	0,50	1,39	1,59	2,17	6,03	6,93	3,75	—	—	—	—
	18.000	—	—	5,20	—	—	1,89	5,20	7,22	0,50	1,39	1,59	2,17	6,03	6,93	3,75	—	—	—	—
	20M	20M	—	2,50	2,50	—	2,30	5,00	6,56	0,57	1,34	1,87	2,49	5,83	8,12	3,73	TO	3,80	4,80	1768
	8.000	8.000	—	2,50	2,50	—	2,30	5,00	6,56	0,57	1,34	1,87	2,49	5,83	8,12	3,73	TO	3,80	4,80	1768
	20M	27M	—	2,45	3,15	—	2,30	5,60	6,97	0,57	1,50	1,98	2,49	6,53	8,60	3,73	TO	3,80	5,00	1842
	8.000	9.000	—	2,45	3,15	—	2,30	5,60	6,97	0,57	1,50	1,98	2,49	6,53	8,60	3,73	TO	3,80	5,00	1842
	20M	35M	—	2,21	3,79	—	2,30	6,00	7,38	0,57	1,61	2,20	2,49	6,99	9,56	3,73	TO	3,80	5,10	1879
	8.000	12.000	—	2,21	3,79	—	2,30	6,00	7,38	0,57	1,61	2,20	2,49	6,99	9,56	3,73	TO	3,80	5,10	1879
	20M	53M	—	1,96	5,04	—	2,30	7,00	8,20	0,57	1,88	2,42	2,49	8,16	10,51	3,73	TO	3,80	5,10	1879
	8.000	18.000	—	1,96	5,04	—	2,30	7,00	8,20	0,57	1,88	2,42	2,49	8,16	10,51	3,73	TO	3,80	5,10	1879
	27M	27M	—	3,00	3,00	—	2,30	6,00	7,38	0,57	1,61	2,20	2,49	6,99	9,56	3,73	TO	3,80	5,10	1879
	9.000	9.000	—	3,00	3,00	—	2,30	6,00	7,38	0,57	1,61	2,20	2,49	6,99	9,56	3,73	TO	3,80	5,10	1879
	27M	35M	—	2,70	3,60	—	2,30	6,30	7,79	0,57	1,69	2,31	2,49	7,34	10,04	3,73	TO	3,80	5,10	1879
	9.000	12.000	—	2,70	3,60	—	2,30	6,30	7,79	0,57	1,69	2,31	2,49	7,34	10,04	3,73	TO	3,80	5,10	1879
	27M	53M	—	2,33	4,67	—	2,30	7,00	8,20	0,57	1,88	2,42	2,49	8,16	10,51	3,73	TO	3,80	5,10	1879
	9.000	18.000	—	2,33	4,67	—	2,30	7,00	8,20	0,57	1,88	2,42	2,49	8,16	10,51	3,73	TO	3,80	5,10	1879
	35M	35M	—	3,25	3,25	—	2,30	6,50	7,95	0,57	1,74	2,37	2,49	7,58	10,32	3,73	TO	3,80	5,10	1879
	12.000	12.000	—	3,25	3,25	—	2,30	6,50	7,95	0,57	1,74	2,37	2,49	7,58	10,32	3,73	TO	3,80	5,10	1879
35M	53M	—	2,80	4,20	—	2,30	7,00	8,20	0,57	1,88	2,42	2,49	8,16	10,51	3,73	TO	3,80	5,10	1879	
12.000	18.000	—	2,80	4,20	—	2,30	7,00	8,20	0,57	1,88	2,42	2,49	8,16	10,51	3,73	TO	3,80	5,10	1879	
MU2-Y 79M (1x3)	20M	20M	20M	2,73	2,73	2,73	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	8.000	8.000	8.000	2,73	2,73	2,73	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	20M	20M	27M	2,50	2,50	3,21	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	8.000	8.000	9.000	2,50	2,50	3,21	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	20M	20M	35M	2,21	2,21	3,78	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	8.000	8.000	12.000	2,21	2,21	3,78	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	20M	20M	53M	1,79	1,79	4,61	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	8.000	8.000	18.000	1,79	1,79	4,61	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	20M	27M	27M	2,30	2,95	2,95	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	8.000	9.000	9.000	2,30	2,95	2,95	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	20M	27M	35M	2,35	2,64	3,51	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	8.000	9.000	12.000	2,35	2,64	3,51	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	20M	27M	53M	1,69	2,17	4,34	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	8.000	9.000	18.000	1,69	2,17	4,34	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	20M	35M	35M	1,85	3,17	3,17	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	8.000	12.000	12.000	1,85	3,17	3,17	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	27M	27M	27M	2,73	2,73	2,73	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
	9.000	9.000	9.000	2,73	2,73	2,73	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995
27M	27M	35M	2,46	2,46	3,28	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995	
9.000	9.000	12.000	2,46	2,46	3,28	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995	
27M	35M	35M	2,24	2,98	2,98	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995	
9.000	12.000	12.000	2,24	2,98	2,98	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995	
35M	35M	35M	2,73	2,73	2,73	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995	
12.000	12.000	12.000	2,73	2,73	2,73	2,87	8,20	9,84	0,68	2,20	2,75	2,96	9,56	11,95	3,73	A+	4,00	5,70	1995	

Notes Pd = Pdesign CEA = Annual Energy Consumption

MULTISplit

# COMBINATION TABLES

## Outdoor unit: MU2-Y 82M (QUADRI)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT				COOLING CAPACITY [KW]				TOTAL COOLING CAPACITY [KW]			POWER INPUT COOLING [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	D	TO	B	C	D	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SEER	Pd	CEA [kWh]
MU2-Y 82M (1x1)	20M	—	—	—	2,30	—	—	—	1,52	2,00	2,90	0,40	0,62	0,77	1,74	2,69	3,37	3,23	—	—	—	—
	8.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	27M	—	—	—	2,50	—	—	—	1,52	2,50	3,20	0,40	0,77	0,97	1,74	3,37	4,21	3,23	—	—	—	—
	9.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	35M	—	—	—	3,50	—	—	—	1,52	3,50	3,90	0,40	1,08	1,30	1,74	4,71	5,65	3,23	—	—	—	—
	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
MU2-Y 82M (1x2)	53M	—	—	—	5,00	—	—	—	1,72	5,00	6,50	0,50	1,55	1,78	2,17	6,73	7,74	3,23	—	—	—	—
	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	20M	—	—	2,10	2,10	—	—	2,05	4,20	6,07	0,63	1,30	2,03	2,76	5,65	8,83	3,23	TO	5,10	4,20	288
	8.000	8.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	27M	—	—	2,36	2,64	—	—	2,05	4,70	6,40	0,63	1,46	2,16	2,76	6,33	9,38	3,23	TO	5,10	4,70	323
	8.000	9.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	35M	—	—	1,95	3,35	—	—	2,05	5,30	6,81	0,63	1,64	2,28	2,76	7,13	9,93	3,23	TO	5,10	5,30	364
	8.000	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	53M	—	—	1,96	5,04	—	—	2,05	7,00	7,54	0,63	2,17	2,79	2,76	9,42	12,14	3,23	TO	5,10	7,00	480
	8.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	27M	27M	—	—	2,65	2,65	—	—	2,05	5,30	6,81	0,63	1,64	2,28	2,76	7,13	9,93	3,23	TO	5,10	5,30	364
	9.000	9.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	27M	35M	—	—	2,57	3,43	—	—	2,05	6,00	6,97	0,63	1,86	2,41	2,76	8,08	10,49	3,23	TO	5,10	6,00	412
	9.000	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	27M	53M	—	—	2,43	4,87	—	—	2,05	7,30	7,54	0,63	2,26	2,79	2,76	9,83	12,14	3,23	TO	5,10	7,30	501
	9.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	35M	35M	—	—	3,25	3,25	—	—	2,05	6,50	7,38	0,63	2,01	2,49	2,76	8,75	10,82	3,23	TO	5,10	6,50	446
	12.000	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
35M	53M	—	—	2,92	4,38	—	—	2,05	7,30	7,54	0,63	2,26	2,79	2,76	9,83	12,14	3,23	TO	5,10	7,30	501	
12.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
53M	53M	—	—	3,75	3,75	—	—	2,05	7,50	7,54	0,63	2,32	2,79	2,76	10,10	12,14	3,23	TO	5,10	7,50	515	
18.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
MU2-Y 82M (1x3)	20M	20M	20M	—	2,30	2,30	2,30	—	2,62	6,00	8,45	0,76	1,86	2,94	3,31	8,08	12,80	3,23	A+	6,50	6,00	323
	8.000	8.000	8.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	20M	27M	—	1,98	1,98	2,54	—	2,62	6,50	8,45	0,76	2,01	2,94	3,31	8,75	12,80	3,23	A+	6,50	6,50	350
	8.000	8.000	9.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	20M	35M	—	1,91	1,91	3,28	—	2,62	7,10	8,45	0,76	2,20	2,94	3,31	9,56	12,80	3,23	A+	6,50	7,10	382
	8.000	8.000	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	20M	53M	—	1,71	1,71	4,39	—	2,62	7,80	8,45	0,76	2,41	2,94	3,31	10,50	12,80	3,23	A+	6,50	7,80	420
	8.000	8.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	27M	27M	—	1,90	2,45	2,68	—	2,62	6,80	8,45	0,76	2,11	2,94	3,31	9,15	12,80	3,23	A+	6,50	6,80	366
	8.000	9.000	9.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	27M	35M	—	1,88	2,41	3,21	—	2,62	7,50	8,45	0,76	2,32	2,94	3,31	10,10	12,80	3,23	A+	6,50	7,50	404
	8.000	9.000	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	27M	53M	—	1,61	2,36	4,13	—	2,62	7,80	8,45	0,76	2,41	2,94	3,31	10,50	12,80	3,23	A+	6,50	7,80	420
	8.000	9.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	35M	35M	—	1,76	3,02	3,02	—	2,62	7,80	8,45	0,76	2,41	2,94	3,31	10,50	12,80	3,23	A+	6,50	7,80	420
	8.000	12.000	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	20M	35M	53M	—	1,48	2,53	3,79	—	2,62	7,80	8,45	0,76	2,41	2,94	3,31	10,50	12,80	3,23	A+	6,50	7,80	420
	8.000	12.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	27M	27M	27M	—	2,37	2,37	2,37	—	2,62	7,10	8,45	0,76	2,20	2,94	3,31	9,56	12,80	3,23	A+	6,50	7,10	382
	9.000	9.000	9.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	27M	27M	35M	—	2,34	2,34	3,12	—	2,62	7,80	8,45	0,76	2,41	2,94	3,31	10,50	12,80	3,23	A+	6,50	7,80	420
9.000	9.000	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
27M	27M	53M	—	1,95	1,95	3,90	—	2,62	7,80	8,45	0,76	2,41	2,94	3,31	10,50	12,80	3,23	A+	6,50	7,80	420	
9.000	9.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
27M	35M	35M	—	2,13	2,84	2,84	—	2,62	7,80	8,45	0,76	2,41	2,94	3,31	10,50	12,80	3,23	A+	6,50	7,80	420	
9.000	12.000	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
27M	35M	53M	—	1,80	2,40	3,60	—	2,62	7,80	8,45	0,76	2,41	2,94	3,31	10,50	12,80	3,23	A+	6,50	7,80	420	
9.000	12.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
35M	35M	35M	—	2,60	2,60	2,60	—	2,62	7,80	8,45	0,76	2,41	2,94	3,31	10,50	12,80	3,23	A+	6,50	7,80	420	
12.000	12.000	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		

Notes Pd = Pdesign CEA = Annual Energy Consumption

# COMBINATION TABLES

## Outdoor unit: MU2-Y 82M (QUADRI)

OUTDOOR UNIT	INDOOR UNIT				COOLING CAPACITY [KW]				TOTAL COOLING CAPACITY [KW]			POWER INPUT COOLING [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)			CEA [kWh]
	TO	B	C	D	TO	B	C	D	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SEER	Pd	
MU2-Y 82M (1x4)	20M 8.000	20M 8.000	20M 8.000	20M 8.000	2,30	2,30	2,30	2,30	2,87	8,20	9,92	0,86	2,54	3,17	3,75	11,04	13,80	3,23	A++	7,00	8,20	410
	20M 8.000	20M 8.000	20M 8.000	27M 9.000	1,91	1,91	1,91	2,46	2,87	8,20	9,92	0,86	2,54	3,17	3,75	11,04	13,80	3,23	A++	7,00	8,20	410
	20M 8.000	20M 8.000	20M 8.000	35M 12.000	1,74	1,74	1,74	2,98	2,87	8,20	9,92	0,86	2,54	3,17	3,75	11,04	13,80	3,23	A++	7,00	8,20	410
	20M 8.000	20M 8.000	20M 8.000	53M 18.000	1,47	1,47	1,47	3,78	2,87	8,20	9,92	0,86	2,54	3,17	3,75	11,04	13,80	3,23	A++	7,00	8,20	410
	20M 8.000	20M 8.000	27M 9.000	27M 9.000	1,79	1,79	2,31	2,31	2,87	8,20	9,92	0,86	2,54	3,17	3,75	11,04	13,80	3,23	A++	7,00	8,20	410
	20M 8.000	20M 8.000	27M 9.000	35M 12.000	1,64	1,64	2,11	2,81	2,87	8,20	9,92	0,86	2,54	3,17	3,75	11,04	13,80	3,23	A++	7,00	8,20	410
	20M 8.000	20M 8.000	35M 12.000	35M 12.000	1,51	1,51	2,59	2,59	2,87	8,20	9,92	0,86	2,54	3,17	3,75	11,04	13,80	3,23	A++	7,00	8,20	410
	20M 8.000	27M 9.000	27M 9.000	27M 9.000	1,69	2,17	2,17	2,17	2,87	8,20	9,92	0,86	2,54	3,17	3,75	11,04	13,80	3,23	A++	7,00	8,20	410
	20M 8.000	27M 9.000	27M 9.000	35M 12.000	1,55	1,99	1,99	2,66	2,87	8,20	9,92	0,86	2,54	3,17	3,75	11,04	13,80	3,23	A++	7,00	8,20	410
	20M 8.000	27M 9.000	35M 12.000	35M 12.000	1,44	1,85	2,46	2,46	2,87	8,20	9,92	0,86	2,54	3,17	3,75	11,04	13,80	3,23	A++	7,00	8,20	410
	<b>27M 9.000</b>	<b>27M 9.000</b>	<b>27M 9.000</b>	<b>27M 9.000</b>	<b>2,35</b>	<b>2,35</b>	<b>2,35</b>	<b>2,35</b>	<b>2,87</b>	<b>8,20</b>	<b>9,92</b>	<b>0,86</b>	<b>2,54</b>	<b>3,17</b>	<b>3,75</b>	<b>11,04</b>	<b>13,80</b>	<b>3,23</b>	<b>A++</b>	<b>7,00</b>	<b>8,20</b>	<b>410</b>
	27M 9.000	27M 9.000	27M 9.000	35M 12.000	1,89	1,89	1,89	2,52	2,87	8,20	9,92	0,86	2,54	3,17	3,75	11,04	13,80	3,23	A++	7,00	8,20	410

MULTISPLIT

Notes Pd = Pdesign CEA = Annual Energy Consumption

# COMBINATION TABLES

## Outdoor unit: MU2-Y 82M (QUADRI)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT				HEATING CAPACITY [KW]				TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)							
	TO	B	C	D	TO	B	C	D	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SCOP	Pd	CEA [kWh]				
MU2-Y 82M (1x1)	20M	8,000	—	—	2,50	—	—	—	1,63	2,50	2,90	0,40	0,67	0,83	1,74	2,90	3,62	3,75	—	—	—	—				
	27M	9,000	—	—	3,00	—	—	—	1,63	3,00	3,20	0,40	0,80	1,00	1,74	3,48	4,35	3,75	—	—	—	—				
	35M	12,000	—	—	3,80	—	—	—	1,63	3,80	3,90	0,40	1,01	1,22	1,74	4,41	5,29	3,75	—	—	—	—				
	53M	18,000	—	—	5,60	—	—	—	1,85	5,60	6,78	0,50	1,48	1,70	2,17	6,44	7,41	3,78	—	—	—	—				
	20M	20M	8,000	8,000	—	—	2,50	2,50	—	—	2,20	5,00	6,51	0,59	1,31	1,90	2,58	5,71	8,25	3,81	TO	3,40	3,85	1585		
	20M	27M	8,000	9,000	—	—	2,45	3,15	—	—	2,20	5,60	6,86	0,59	1,47	2,02	2,58	6,39	8,77	3,81	TO	3,40	4,31	1776		
MU2-Y 82M (1x2)	20M	20M	8,000	9,000	—	—	2,21	3,79	—	—	2,20	6,00	7,30	0,59	1,57	2,13	2,58	6,85	9,28	3,81	TO	3,40	4,62	1902		
	20M	27M	8,000	12,000	—	—	2,21	3,79	—	—	2,20	6,00	7,30	0,59	1,57	2,13	2,58	6,85	9,28	3,81	TO	3,40	4,62	1902		
	20M	35M	8,000	12,000	—	—	2,21	3,79	—	—	2,20	6,00	7,30	0,59	1,57	2,13	2,58	6,85	9,28	3,81	TO	3,40	4,62	1902		
	20M	53M	8,000	18,000	—	—	2,18	5,62	—	—	2,20	7,80	8,10	0,59	2,03	2,61	2,58	8,81	11,34	3,85	TO	3,40	6,01	2473		
	27M	27M	9,000	9,000	—	—	3,00	3,00	—	—	2,20	6,00	7,30	0,59	1,57	2,13	2,58	6,85	9,28	3,81	TO	3,40	4,62	1902		
	27M	35M	9,000	12,000	—	—	3,00	4,00	—	—	2,20	7,00	7,48	0,59	1,84	2,25	2,58	7,99	9,80	3,81	TO	3,40	5,39	2219		
	27M	53M	9,000	18,000	—	—	2,63	5,27	—	—	2,20	7,90	8,10	0,59	2,05	2,61	2,58	8,92	11,34	3,85	TO	3,40	6,08	2505		
	35M	35M	12,000	12,000	—	—	3,75	3,75	—	—	2,20	7,50	7,92	0,59	1,97	2,32	2,58	8,56	10,11	3,81	TO	3,40	5,78	2378		
	35M	53M	12,000	18,000	—	—	3,20	4,80	—	—	2,20	8,00	8,10	0,59	2,08	2,61	2,58	9,03	11,34	3,85	TO	3,40	6,08	2505		
	53M	53M	18,000	18,000	—	—	4,00	4,00	—	—	2,20	8,00	8,10	0,59	2,08	2,61	2,58	9,03	11,34	3,85	TO	3,40	6,08	2505		
	20M	20M	8,000	8,000	20M	8,000	—	—	2,33	2,33	2,33	—	2,82	7,00	9,06	0,71	1,89	2,75	3,09	8,20	11,96	3,71	TO	3,50	5,39	2156
	20M	20M	8,000	8,000	27M	9,000	—	—	2,37	2,37	3,05	—	2,82	7,80	9,06	0,71	2,10	2,75	3,09	9,14	11,96	3,71	TO	3,50	6,01	2402
	20M	20M	8,000	8,000	35M	12,000	—	—	2,26	2,26	3,88	—	2,82	8,40	9,06	0,71	2,26	2,75	3,09	9,84	11,96	3,71	TO	3,50	6,10	2440
	20M	20M	8,000	8,000	53M	18,000	—	—	1,88	1,88	4,84	—	2,82	8,60	9,06	0,71	2,32	2,75	3,09	10,08	11,96	3,71	TO	3,50	6,20	2480
20M	27M	8,000	9,000	27M	9,000	—	—	2,35	3,02	2,68	—	2,82	8,40	9,06	0,71	2,26	2,75	3,09	9,84	11,96	3,71	TO	3,50	6,10	2440	
20M	27M	8,000	9,000	35M	12,000	—	—	2,13	2,73	3,64	—	2,82	8,50	9,06	0,71	2,29	2,75	3,09	9,96	11,96	3,71	TO	3,50	6,20	2480	
20M	27M	8,000	9,000	53M	18,000	—	—	1,77	2,28	4,55	—	2,82	8,60	9,06	0,71	2,32	2,75	3,09	10,08	11,96	3,71	TO	3,50	6,20	2480	
20M	35M	8,000	12,000	35M	12,000	—	—	1,94	3,33	3,33	—	2,82	8,60	9,06	0,71	2,32	2,75	3,09	10,08	11,96	3,71	TO	3,50	6,20	2480	
20M	35M	8,000	12,000	53M	18,000	—	—	1,63	2,79	4,18	—	2,82	8,60	9,06	0,71	2,32	2,75	3,09	10,08	11,96	3,71	TO	3,50	6,20	2480	
27M	27M	9,000	9,000	27M	9,000	—	—	2,87	2,87	2,87	—	2,82	8,60	9,06	0,71	2,32	2,75	3,09	10,08	11,96	3,71	TO	3,50	6,20	2480	
27M	27M	9,000	9,000	35M	12,000	—	—	2,58	2,58	3,44	—	2,82	8,60	9,06	0,71	2,32	2,75	3,09	10,08	11,96	3,71	TO	3,50	6,20	2480	
27M	27M	9,000	9,000	53M	18,000	—	—	2,15	2,15	4,30	—	2,82	8,60	9,06	0,71	2,32	2,75	3,09	10,08	11,96	3,71	TO	3,50	6,20	2480	
27M	35M	9,000	12,000	35M	12,000	—	—	2,35	3,13	3,13	—	2,82	8,60	9,06	0,71	2,32	2,75	3,09	10,08	11,96	3,71	TO	3,50	6,20	2480	
27M	35M	9,000	12,000	53M	18,000	—	—	1,98	2,65	3,97	—	2,82	8,60	9,06	0,71	2,32	2,75	3,09	10,08	11,96	3,71	TO	3,50	6,20	2480	
35M	35M	12,000	12,000	35M	12,000	—	—	2,87	2,87	2,87	—	2,82	8,60	9,06	0,71	2,32	2,75	3,09	10,08	11,96	3,71	TO	3,50	6,20	2480	

Notes Pd = Pdesign CEA = Annual Energy Consumption

# COMBINATION TABLES

## Outdoor unit: MU2-Y 82M (QUADRI)

OUTDOOR UNIT	INDOOR UNIT				HEATING CAPACITY [KW]				TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)			CEA [kWh]
	TO	B	C	D	TO	B	C	D	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SCOP	Pd	
MU2-Y 82M (1x4)	20M 8.000	20M 8.000	20M 8.000	20M 8.000	2,20	2,20	2,20	2,20	3,08	8,80	10,65	0,81	2,37	2,96	3,51	10,31	12,89	3,71	TO	4,00	6,50	2275
	20M 8.000	20M 8.000	20M 8.000	27M 9.000	2,35	2,35	2,35	2,64	3,08	8,80	10,65	0,81	2,37	2,96	3,51	10,31	12,89	3,71	TO	4,00	6,50	2275
	20M 8.000	20M 8.000	20M 8.000	35M 12.000	1,87	1,87	1,87	3,20	3,08	8,80	10,65	0,81	2,37	2,96	3,51	10,31	12,89	3,71	TO	4,00	6,50	2275
	20M 8.000	20M 8.000	20M 8.000	53M 18.000	1,58	1,58	1,58	4,06	3,08	8,80	10,65	0,81	2,37	2,96	3,51	10,31	12,89	3,71	TO	4,00	6,50	2275
	20M 8.000	20M 8.000	27M 9.000	27M 9.000	1,93	1,93	2,48	2,48	3,08	8,80	10,65	0,81	2,37	2,96	3,51	10,31	12,89	3,71	TO	4,00	6,50	2275
	20M 8.000	20M 8.000	27M 9.000	35M 12.000	1,76	1,76	2,26	3,02	3,08	8,80	10,65	0,81	2,37	2,96	3,51	10,31	12,89	3,71	TO	4,00	6,50	2275
	20M 8.000	20M 8.000	35M 12.000	35M 12.000	1,62	1,62	2,78	2,78	3,08	8,80	10,65	0,81	2,37	2,96	3,51	10,31	12,89	3,71	TO	4,00	6,50	2275
	20M 8.000	27M 9.000	27M 9.000	27M 9.000	1,81	2,33	2,33	2,33	3,08	8,80	10,65	0,81	2,37	2,96	3,51	10,31	12,89	3,71	TO	4,00	6,50	2275
	20M 8.000	27M 9.000	27M 9.000	35M 12.000	1,66	2,14	2,14	2,85	3,08	8,80	10,65	0,81	2,37	2,96	3,51	10,31	12,89	3,71	TO	4,00	6,50	2275
	20M 8.000	27M 9.000	35M 12.000	35M 12.000	1,54	1,98	2,64	2,64	3,08	8,80	10,65	0,81	2,37	2,96	3,51	10,31	12,89	3,71	TO	4,00	6,50	2275
	<b>27M 9.000</b>	<b>27M 9.000</b>	<b>27M 9.000</b>	<b>27M 9.000</b>	<b>2,20</b>	<b>2,20</b>	<b>2,20</b>	<b>2,20</b>	<b>3,08</b>	<b>8,80</b>	<b>10,65</b>	<b>0,81</b>	<b>2,37</b>	<b>2,96</b>	<b>3,51</b>	<b>10,31</b>	<b>12,89</b>	<b>3,71</b>	<b>TO</b>	<b>4,00</b>	<b>6,50</b>	<b>2275</b>
	27M 9.000	27M 9.000	27M 9.000	35M 12.000	2,33	2,33	2,33	2,71	3,08	8,80	10,65	0,81	2,37	2,96	3,51	10,31	12,89	3,71	TO	4,00	6,50	2275

Notes Pd = Pdesign CEA = Annual Energy Consumption

MULTISplit



# COMBINATION TABLES

## Outdoor unit: MU2-Y 105M (QUADRI)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT				COOLING CAPACITY [KW]				TOTAL COOLING CAPACITY [KW]			POWER INPUT COOLING [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)				
	TO	B	C	D	TO	B	C	D	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SEER	Pd	CEA [kWh]	
MU2-Y 105M (1x1)	20M	—	—	—	2,00	—	—	—	1,58	2,00	2,90	0,45	0,61	0,76	1,96	2,85	3,56	3,28	—	—	—	—	
	8.000	—	—	—	2,50	—	—	—	1,58	2,50	3,20	0,45	0,76	0,95	1,96	3,56	4,45	3,28	—	—	—	—	
	27M	—	—	—	3,50	—	—	—	1,58	3,50	3,90	0,45	1,07	1,28	1,96	4,99	5,99	3,28	—	—	—	—	
	9.000	—	—	—	5,00	—	—	—	1,79	5,00	6,50	0,58	1,52	1,75	2,52	7,13	8,20	3,28	—	—	—	—	
	35M	—	—	—	7,00	—	—	—	2,21	7,00	8,00	0,62	2,13	2,45	2,70	9,98	11,48	3,28	—	—	—	—	
	12.000	—	—	—	10,60	—	—	—	-	10,60	-	-	3,50	-	-	-	-	3,01	A++	6,10	10,60	613	
	53M	—	—	—	2,10	2,10	—	—	2,21	4,20	6,30	0,62	1,28	2,11	2,89	5,99	9,89	3,28	A++	6,10	4,20	241	
	18.000	—	—	—	2,06	2,64	—	—	2,21	4,70	6,51	0,62	1,43	2,28	2,89	6,70	10,65	3,28	A++	6,10	4,70	270	
	70M	—	—	—	2,03	3,47	—	—	2,21	5,50	6,83	0,62	1,68	2,44	2,89	7,84	11,41	3,28	A++	6,10	5,50	316	
24.000	—	—	—	1,96	5,04	—	—	2,21	7,00	8,40	0,62	2,13	2,86	2,89	9,98	13,39	3,28	A++	6,10	7,00	402		
HYDRO-M	—	—	—	2,03	6,97	—	—	2,21	9,00	9,45	0,62	2,74	3,06	2,89	12,83	14,30	3,28	A++	6,10	9,00	516		
MU2-Y 105M (1x2)	20M	20M	—	—	2,65	2,65	—	—	2,21	5,30	6,83	0,62	1,62	2,44	2,89	7,56	11,41	3,28	A++	6,10	5,30	304	
	8.000	8.000	—	—	2,57	3,43	—	—	2,21	6,00	7,35	0,62	1,83	2,60	2,89	8,55	12,17	3,28	A++	6,10	6,00	344	
	20M	27M	—	—	2,50	5,00	—	—	2,21	7,50	9,45	0,62	2,29	2,93	2,89	10,69	13,70	3,28	A++	6,10	7,50	430	
	8.000	9.000	—	—	2,59	6,91	—	—	2,21	9,50	9,98	0,62	2,90	3,12	2,89	13,54	14,61	3,28	A++	6,10	9,50	545	
	20M	35M	—	—	3,50	3,50	—	—	2,21	7,00	7,88	0,62	2,13	2,76	2,89	9,98	12,93	3,28	A++	6,10	7,00	402	
	8.000	12.000	—	—	3,40	5,10	—	—	2,21	8,50	9,98	0,62	2,59	2,93	2,89	12,12	13,70	3,28	A++	6,10	8,50	488	
	20M	53M	—	—	3,33	6,67	—	—	2,21	10,00	10,50	0,62	3,09	3,19	2,89	14,44	14,91	3,24	A++	6,10	10,00	574	
	8.000	18.000	—	—	5,00	5,00	—	—	2,21	10,00	10,50	0,62	3,09	3,25	2,89	14,44	15,22	3,24	A++	6,10	10,00	574	
	20M	70M	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	8.000	24.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	27M	27M	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	9.000	9.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	27M	35M	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	9.000	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	27M	53M	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
9.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
27M	70M	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
9.000	24.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
35M	35M	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
12.000	12.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
35M	53M	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
12.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
35M	70M	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
12.000	24.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
53M	53M	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
18.000	18.000	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

Notes Pd = Pdesign CEA = Annual Energy Consumption

replaceable indoor unit with HYDRO-M hydronic module

Note: Hydraulic module and direct expansion indoor units cannot operate at the same time.

# COMBINATION TABLES

## Outdoor unit: MU2-Y 105M (QUADRI)

OUTDOOR UNIT	INDOOR UNIT				COOLING CAPACITY [KW]				TOTAL COOLING CAPACITY [KW]			POWER INPUT COOLING [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)			CEA [kWh]
	TO	B	C	D	TO	B	C	D	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SEER	Pd	
MU2-Y 105M (1x3)	20M	20M	20M	—	2,00	2,00	2,00	—	2,84	6,00	7,35	0,78	1,80	2,93	3,65	8,42	13,70	3,33	A++	6,30	6,00	333
	8,000	8,000	8,000	—	1,98	1,98	2,54	—	2,84	6,50	7,88	0,78	1,98	3,09	3,65	9,27	14,46	3,28	A++	6,30	6,50	361
	20M	20M	27M	—	2,02	2,02	3,46	—	2,84	7,50	8,93	0,78	2,29	3,25	3,65	10,69	15,22	3,28	A++	6,30	7,50	417
	8,000	8,000	9,000	—	1,97	1,97	5,06	—	2,84	9,00	11,55	0,78	2,74	3,58	3,65	12,83	16,74	3,28	A++	6,30	9,00	500
	20M	20M	35M	—	1,84	1,84	6,32	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	8,000	8,000	12,000	—	1,96	2,52	2,52	—	2,84	7,00	8,93	0,78	2,13	3,25	3,65	9,98	15,22	3,28	A++	6,30	7,00	389
	20M	27M	27M	—	2,00	2,57	3,43	—	2,84	8,00	9,98	0,78	2,44	3,41	3,65	11,40	15,98	3,28	A++	6,30	8,00	444
	8,000	9,000	9,000	—	1,96	2,51	5,03	—	2,84	9,50	11,55	0,78	2,93	3,58	3,65	13,72	16,74	3,24	A++	6,30	9,50	528
	20M	27M	53M	—	1,75	2,25	6,00	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	8,000	9,000	18,000	—	2,03	3,48	3,48	—	2,84	9,00	10,50	0,78	2,78	3,41	3,65	13,00	15,98	3,24	A++	6,30	9,00	500
	20M	35M	35M	—	1,89	3,24	4,86	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	8,000	12,000	12,000	—	1,63	2,79	5,58	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	20M	35M	70M	—	1,63	4,19	4,19	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	8,000	12,000	24,000	—	2,50	2,50	2,50	—	2,84	7,50	9,98	0,78	2,31	3,41	3,65	10,83	15,98	3,24	A++	6,30	7,50	417
	20M	53M	53M	—	2,55	2,55	3,40	—	2,84	8,50	10,50	0,78	2,62	3,41	3,65	12,28	15,98	3,24	A++	6,30	8,50	472
	8,000	18,000	18,000	—	2,50	2,50	5,00	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	27M	27M	70M	—	2,14	2,14	5,71	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	9,000	9,000	24,000	—	2,59	3,45	3,45	—	2,84	9,50	11,55	0,78	2,93	3,58	3,65	13,72	16,74	3,24	A++	6,30	9,50	528
	27M	35M	35M	—	2,31	3,08	4,62	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	9,000	12,000	12,000	—	2,00	2,67	5,33	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	27M	35M	70M	—	2,00	4,00	4,00	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	9,000	18,000	18,000	—	3,33	3,33	3,33	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	35M	35M	35M	—	2,86	2,86	4,29	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	12,000	12,000	12,000	—	2,50	2,50	5,00	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	35M	35M	70M	—	2,50	3,75	3,75	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	12,000	12,000	24,000	—	2,50	3,75	3,75	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	35M	53M	53M	—	2,50	3,75	3,75	—	2,84	10,00	11,55	0,78	3,09	3,58	3,65	14,44	16,74	3,24	A++	6,30	10,00	556
	12,000	18,000	18,000	—																		

Notes Pd = Pdesign CEA = Annual Energy Consumption

replaceable indoor unit with HYDRO-M hydronic module

Note: Hydraulic module and direct expansion indoor units cannot operate at the same time.

MULTISplit

# COMBINATION TABLES

## Outdoor unit: MU2-Y 105M (QUADRI)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT				COOLING CAPACITY [KW]				TOTAL COOLING CAPACITY [KW]			POWER INPUT COOLING [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)			
	T0	B	C	D	T0	B	C	D	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SEER	Pd	CEA [kWh]
MU2-Y 105M (1x4)	20M	20M	20M	20M	2,05	2,05	2,05	2,05	3,68	8,20	10,50	0,88	2,29	3,25	4,11	10,64	15,22	3,58	A++	6,50	8,20	442
	8.000	8.000	8.000	8.000	1,98	1,98	1,98	2,55	3,68	8,50	11,55	0,88	2,47	3,41	4,11	11,51	15,98	3,44	A++	6,50	8,50	458
	20M	20M	20M	27M	2,02	2,02	2,02	3,45	3,68	9,50	12,60	0,88	2,86	3,84	4,11	13,37	17,96	3,32	A++	6,50	9,50	512
	8.000	8.000	8.000	12.000	1,87	1,87	1,87	4,80	3,68	10,40	13,65	0,88	3,22	3,97	4,11	15,07	18,57	3,23	A++	6,50	10,40	560
	20M	20M	20M	53M	1,63	1,63	1,63	5,60	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	8.000	8.000	8.000	18.000	1,97	1,97	2,53	2,53	3,68	9,00	12,60	0,88	2,71	3,84	4,11	12,66	17,96	3,32	A++	6,50	9,00	485
	20M	20M	20M	70M	2,00	2,00	2,57	3,43	3,68	10,00	13,13	0,88	3,09	3,90	4,11	14,44	18,26	3,24	A++	6,50	10,00	538
	8.000	8.000	9.000	12.000	1,79	1,79	2,30	4,61	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	20M	20M	27M	53M	1,56	1,56	2,01	5,36	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	8.000	8.000	9.000	24.000	1,93	1,93	3,32	3,32	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	20M	20M	35M	35M	1,67	1,67	2,86	4,30	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	8.000	8.000	12.000	12.000	1,47	1,47	3,78	3,78	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	20M	20M	53M	53M	1,96	2,51	2,51	2,51	3,68	9,50	13,13	0,88	2,92	3,84	4,11	13,68	17,96	3,25	A++	6,50	9,50	512
	8.000	8.000	18.000	18.000	1,99	2,55	2,55	3,41	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	20M	27M	27M	27M	1,71	2,20	2,20	4,40	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	8.000	9.000	9.000	9.000	1,50	1,93	1,93	5,14	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	20M	27M	27M	70M	1,84	2,36	3,15	3,15	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	8.000	9.000	9.000	24.000	1,60	2,05	2,74	4,11	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	20M	27M	35M	53M	1,41	1,82	3,63	3,63	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	8.000	9.000	12.000	18.000	1,71	2,93	2,93	2,93	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	20M	27M	35M	53M	1,50	2,57	2,57	3,86	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	8.000	9.000	12.000	18.000	2,63	2,63	2,63	2,63	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	20M	35M	35M	35M	2,42	2,42	2,42	3,23	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	8.000	12.000	12.000	12.000	2,10	2,10	2,10	4,20	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	27M	27M	27M	27M	2,25	2,25	3,00	3,00	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	9.000	9.000	9.000	9.000	1,97	1,97	2,63	3,94	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	27M	27M	35M	35M	2,10	2,80	2,80	2,80	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	9.000	9.000	12.000	12.000	1,85	2,47	2,47	3,71	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	27M	35M	35M	53M	2,63	2,63	2,63	2,63	3,68	10,50	13,65	0,88	3,25	3,97	4,11	15,22	18,57	3,23	A++	6,50	10,50	565
	9.000	12.000	12.000	18.000																		

Notes Pd = Pdesign CEA = Annual Energy Consumption

replaceable indoor unit with HYDRO-M hydronic module

Note: Hydraulic module and direct expansion indoor units cannot operate at the same time.

# COMBINATION TABLES

## Outdoor unit: MU2-Y 105M (QUADRI)

OUTDOOR UNIT	INDOOR UNIT				HEATING CAPACITY [KW]				TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	D	TO	B	C	D	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SCOP	Pd	CEA [kWh]
MU2-Y 105M (1x1)	20M	—	—	—	2,50	—	—	—	1,67	2,50	2,90	0,45	0,67	0,84	1,96	3,00	3,75	3,71	—	—	—	—
	8.000	—	—	—	3,00	—	—	—	1,67	3,00	3,20	0,45	0,81	1,01	1,96	3,60	4,50	3,71	—	—	—	—
	27M	—	—	—	3,00	—	—	—	1,67	3,00	3,20	0,45	0,81	1,01	1,96	3,60	4,50	3,71	—	—	—	—
	9.000	—	—	—	3,00	—	—	—	1,67	3,00	3,20	0,45	0,81	1,01	1,96	3,60	4,50	3,71	—	—	—	—
	35M	—	—	—	3,80	—	—	—	1,67	3,80	3,90	0,45	1,02	1,23	1,96	4,56	5,48	3,71	—	—	—	—
	12.000	—	—	—	3,80	—	—	—	1,67	3,80	3,90	0,45	1,02	1,23	1,96	4,56	5,48	3,71	—	—	—	—
	53M	—	—	—	5,20	—	—	—	1,89	5,20	7,00	0,55	1,40	1,61	2,39	6,74	7,76	3,71	—	—	—	—
	18.000	—	—	—	5,20	—	—	—	1,89	5,20	7,00	0,55	1,40	1,61	2,39	6,74	7,76	3,71	—	—	—	—
	70M	—	—	—	7,20	—	—	—	1,89	7,20	8,00	0,58	1,94	2,23	2,52	8,79	10,11	3,71	—	—	—	—
	24.000	—	—	—	7,20	—	—	—	1,89	7,20	8,00	0,58	1,94	2,23	2,52	8,79	10,11	3,71	—	—	—	—
HYDRO-M	—	—	—	11,10	—	—	—	-	11,10	-	-	3,00	-	-	-	-	3,71	TO	3,80	8,80	3246	
MU2-Y 105M (1x2)	20M	20M	—	—	2,50	2,50	—	—	2,33	5,00	6,66	0,57	1,35	1,94	2,51	5,99	8,57	3,71	TO	3,50	4,34	1736
	8.000	8.000	—	—	2,50	2,50	—	—	2,33	5,00	6,66	0,57	1,35	1,94	2,51	5,99	8,57	3,71	TO	3,50	4,34	1736
	20M	27M	—	—	2,45	3,15	—	—	2,33	5,60	6,88	0,57	1,51	2,09	2,51	6,71	9,23	3,71	TO	3,50	3,88	1550
	8.000	9.000	—	—	2,45	3,15	—	—	2,33	5,60	6,88	0,57	1,51	2,09	2,51	6,71	9,23	3,71	TO	3,50	3,88	1550
	20M	35M	—	—	2,21	3,79	—	—	2,33	6,00	7,22	0,57	1,62	2,24	2,51	7,19	9,89	3,71	TO	3,50	4,34	1736
	8.000	12.000	—	—	2,21	3,79	—	—	2,33	6,00	7,22	0,57	1,62	2,24	2,51	7,19	9,89	3,71	TO	3,50	4,34	1736
	20M	53M	—	—	2,24	5,76	—	—	2,33	8,00	8,88	0,57	2,16	2,63	2,51	9,61	11,60	3,71	TO	3,40	4,65	1915
	8.000	18.000	—	—	2,24	5,76	—	—	2,33	8,00	8,88	0,57	2,16	2,63	2,51	9,61	11,60	3,71	TO	3,40	4,65	1915
	20M	70M	—	—	2,17	7,43	—	—	2,33	9,60	10,77	0,57	2,59	2,81	2,51	11,53	12,39	3,71	TO	3,40	4,65	1915
	8.000	24.000	—	—	2,17	7,43	—	—	2,33	9,60	10,77	0,57	2,59	2,81	2,51	11,53	12,39	3,71	TO	3,40	4,65	1915
	27M	27M	—	—	3,00	3,00	—	—	2,33	6,00	7,22	0,57	1,62	2,24	2,51	7,19	9,89	3,71	TO	3,50	6,20	2480
	9.000	9.000	—	—	3,00	3,00	—	—	2,33	6,00	7,22	0,57	1,62	2,24	2,51	7,19	9,89	3,71	TO	3,50	6,20	2480
	27M	35M	—	—	3,00	4,00	—	—	2,33	7,00	7,77	0,57	1,89	2,39	2,51	8,38	10,55	3,71	TO	3,50	4,65	1860
	9.000	12.000	—	—	3,00	4,00	—	—	2,33	7,00	7,77	0,57	1,89	2,39	2,51	8,38	10,55	3,71	TO	3,50	4,65	1860
	27M	53M	—	—	2,93	5,87	—	—	2,33	8,80	9,99	0,57	2,37	2,69	2,51	10,57	11,87	3,71	TO	3,40	5,43	2234
	9.000	18.000	—	—	2,93	5,87	—	—	2,33	8,80	9,99	0,57	2,37	2,69	2,51	10,57	11,87	3,71	TO	3,40	5,43	2234
	27M	70M	—	—	2,67	7,13	—	—	2,33	9,80	10,66	0,57	2,64	2,84	2,51	11,77	12,53	3,71	TO	3,40	4,65	1915
	9.000	24.000	—	—	2,67	7,13	—	—	2,33	9,80	10,66	0,57	2,64	2,84	2,51	11,77	12,53	3,71	TO	3,40	4,65	1915
	35M	35M	—	—	3,75	3,75	—	—	2,33	7,50	8,33	0,57	2,02	2,54	2,51	9,01	11,21	3,71	TO	3,50	6,82	2728
	12.000	12.000	—	—	3,75	3,75	—	—	2,33	7,50	8,33	0,57	2,02	2,54	2,51	9,01	11,21	3,71	TO	3,50	6,82	2728
35M	53M	—	—	3,76	5,64	—	—	2,33	9,40	10,55	0,57	2,53	2,69	2,51	11,29	11,87	3,71	TO	3,40	5,81	2393	
12.000	18.000	—	—	3,76	5,64	—	—	2,33	9,40	10,55	0,57	2,53	2,69	2,51	11,29	11,87	3,71	TO	3,40	5,81	2393	
35M	70M	—	—	3,33	6,67	—	—	2,33	10,00	10,88	0,57	2,70	2,93	2,51	12,01	12,92	3,71	TO	3,40	4,65	1915	
12.000	24.000	—	—	3,33	6,67	—	—	2,33	10,00	10,88	0,57	2,70	2,93	2,51	12,01	12,92	3,71	TO	3,40	4,65	1915	
53M	53M	—	—	5,05	5,05	—	—	2,33	10,10	11,10	0,57	2,72	2,99	2,51	12,16	13,19	3,71	TO	3,60	7,29	2833	
18.000	18.000	—	—	5,05	5,05	—	—	2,33	10,10	11,10	0,57	2,72	2,99	2,51	12,16	13,19	3,71	TO	3,60	7,29	2833	

MULTISplit

Notes Pd - Pdesign CEA - Annual Energy Consumption

replaceable indoor unit with HYDRO-M hydronic module

Note: Hydraulic module and direct expansion indoor units cannot operate at the same time.

# COMBINATION TABLES

## Outdoor unit: MU2-Y 105M (QUADRI)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT				HEATING CAPACITY [KW]				TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	D	TO	B	C	D	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SCOP	Pd	CEA [kWh]
MU2Y 105M (1x3)	20M	20M	20M	—	2,50	2,50	2,50	—	3,00	7,50	7,77	0,72	2,02	2,69	3,16	8,93	11,87	3,71	TO	3,60	8,53	3315
	8.000	8.000	8.000	—	2,37	2,37	3,05	—	3,00	7,80	8,33	0,72	2,10	2,84	3,16	9,29	12,53	3,71	TO	3,60	5,81	2260
	20M	20M	27M	—	2,29	2,29	3,92	—	3,00	8,50	9,44	0,72	2,29	2,99	3,16	10,13	13,19	3,71	TO	3,60	6,05	2351
	8.000	8.000	9.000	—	2,34	2,34	6,02	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,82	14,50	3,71	TO	3,60	6,59	2562
	20M	20M	35M	—	1,97	1,97	6,76	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,82	14,50	3,71	TO	3,60	6,59	2562
	8.000	8.000	12.000	—	2,38	3,06	3,06	—	3,00	8,50	9,44	0,72	2,29	2,99	3,16	10,13	13,19	3,71	TO	3,60	8,91	3466
	20M	20M	53M	—	2,50	3,21	4,29	—	3,00	10,00	10,55	0,72	2,70	3,14	3,16	11,91	13,85	3,71	TO	3,60	6,59	2562
	8.000	8.000	70M	—	2,20	2,83	5,66	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,82	14,50	3,71	TO	3,60	7,75	3014
	20M	20M	70M	—	1,87	2,41	6,42	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,82	14,50	3,71	TO	3,60	7,75	3014
	8.000	8.000	24.000	—	2,28	3,91	3,91	—	3,00	10,10	11,10	0,72	2,72	3,14	3,16	12,10	13,85	3,71	TO	3,60	8,91	3466
	20M	20M	35M	—	2,02	3,47	5,21	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,85	14,50	3,71	TO	3,60	8,53	3315
	8.000	8.000	12.000	—	1,74	2,99	5,97	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,85	14,50	3,71	TO	3,60	8,53	3315
	20M	20M	53M	—	1,74	4,48	4,48	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,89	14,50	3,71	TO	3,60	8,91	3466
	8.000	8.000	18.000	—	3,33	3,33	3,33	—	3,00	10,00	10,55	0,72	2,70	3,14	3,16	11,98	13,85	3,71	TO	3,60	8,91	3466
	20M	20M	27M	—	3,03	3,03	4,04	—	3,00	10,10	11,10	0,72	2,72	3,14	3,16	12,10	13,85	3,71	TO	3,60	7,75	3014
	8.000	8.000	9.000	—	2,68	2,68	5,35	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,89	14,50	3,71	TO	3,60	8,53	3315
	20M	20M	70M	—	2,29	2,29	6,11	—	2,73	10,70	11,11	0,63	2,88	2,90	2,79	12,85	12,78	3,71	TO	3,60	8,53	3315
	8.000	8.000	24.000	—	2,92	3,89	3,89	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,82	14,50	3,71	TO	3,60	8,91	3466
	20M	20M	35M	—	2,47	3,29	4,94	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,85	14,50	3,71	TO	3,60	8,91	3466
	8.000	8.000	18.000	—	2,14	2,85	5,71	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,85	14,50	3,71	TO	3,60	8,91	3466
	20M	20M	53M	—	2,14	4,28	4,28	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,89	14,50	3,71	TO	3,60	8,91	3466
	8.000	8.000	18.000	—	3,57	3,57	3,57	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,82	14,50	3,71	TO	3,60	8,91	3466
	20M	20M	35M	—	3,06	3,06	4,59	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,85	14,50	3,71	TO	3,60	8,91	3466
	8.000	8.000	12.000	—	2,68	2,68	5,35	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,85	14,50	3,71	TO	3,60	8,91	3466
	20M	20M	53M	—	2,68	4,01	4,01	—	3,00	10,70	12,21	0,72	2,88	3,29	3,16	12,85	14,50	3,71	TO	3,60	8,91	3466
	8.000	8.000	18.000	—																		

Notes Pd = Pdesign CEA = Annual Energy Consumption

replaceable indoor unit with HYDRO-M hydronic module

Note: Hydraulic module and direct expansion indoor units cannot operate at the same time.

# COMBINATION TABLES

## Outdoor unit: MU2-Y 105M (QUADRI)

OUTDOOR UNIT	INDOOR UNIT				HEATING CAPACITY [KW]				TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	D	TO	B	C	D	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SCOP	Pd	CEA [kWh]
MU2-Y105M (1x4)	20M	20M	20M	20M	2,50	2,50	2,50	2,50	3,89	10,00	11,10	0,81	2,56	2,99	3,56	11,26	13,19	3,91	A+	4,00	8,91	3119
	8.000	8.000	8.000	8.000																		
	20M	20M	20M	27M	2,36	2,36	2,36	3,03	3,89	10,10	11,66	0,81	2,64	3,14	3,56	11,62	13,85	3,83	A+	4,00	7,75	2713
	8.000	8.000	8.000	9.000																		
	20M	20M	20M	35M	2,31	2,31	2,31	3,96	3,89	10,90	12,21	0,81	2,90	3,29	3,56	12,77	14,50	3,76	A+	4,00	8,53	2984
	8.000	8.000	8.000	12.000																		
	20M	20M	20M	53M	1,99	1,99	1,99	5,12	3,89	11,10	13,32	0,81	2,98	3,89	3,56	13,11	17,14	3,73	A+	4,00	9,15	3201
	8.000	8.000	8.000	18.000																		
	20M	20M	20M	70M	1,73	1,73	1,73	5,92	3,89	11,10	13,32	0,81	2,98	3,89	3,56	13,11	17,14	3,73	A+	4,00	9,15	3201
	8.000	8.000	8.000	24.000																		
	20M	20M	27M	27M	2,38	2,38	3,07	3,07	3,89	10,90	12,21	0,81	2,90	3,29	3,56	12,77	14,50	3,76	A+	4,00	9,20	3220
	8.000	8.000	9.000	9.000																		
	20M	20M	27M	35M	2,22	2,22	2,85	3,81	3,89	11,10	12,77	0,81	2,95	3,59	3,56	13,01	15,82	3,76	A+	4,00	9,15	3201
	8.000	8.000	9.000	12.000																		
	20M	20M	27M	53M	1,90	1,90	2,44	4,87	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220
	8.000	8.000	9.000	18.000																		
	20M	20M	27M	70M	1,65	1,65	2,13	5,67	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220
	8.000	8.000	9.000	24.000																		
	20M	20M	35M	35M	2,04	2,04	3,51	3,51	3,89	11,10	13,32	0,81	2,98	3,89	3,56	13,11	17,14	3,73	A+	4,00	9,20	3220
	8.000	8.000	12.000	12.000																		
	20M	20M	35M	53M	1,77	1,77	3,03	4,54	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,22	17,14	3,71	A+	4,00	9,20	3220
	8.000	8.000	12.000	18.000																		
	20M	20M	53M	53M	1,55	1,55	4,00	4,00	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,22	17,14	3,71	A+	4,00	9,20	3220
	8.000	8.000	18.000	18.000																		
	20M	27M	27M	27M	2,29	2,94	2,94	2,94	3,89	11,10	12,77	0,81	2,95	3,44	3,56	13,01	15,16	3,76	A+	4,00	9,20	3220
	8.000	9.000	9.000	9.000																		
	20M	27M	27M	35M	2,10	2,70	2,70	3,60	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,22	17,14	3,71	A+	4,00	9,20	3220
	8.000	9.000	9.000	12.000																		
	20M	27M	27M	53M	1,81	2,32	2,32	4,65	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220
	8.000	9.000	9.000	18.000																		
	20M	27M	27M	70M	1,59	2,04	2,04	5,44	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220
	8.000	9.000	9.000	24.000																		
	20M	27M	35M	35M	1,94	2,50	3,33	3,33	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,22	17,14	3,71	A+	4,00	9,20	3220
	8.000	9.000	12.000	12.000																		
	20M	27M	35M	53M	1,69	2,17	2,90	4,34	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220
	8.000	9.000	12.000	18.000																		
	20M	27M	53M	53M	1,49	1,92	3,84	3,84	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220
	8.000	9.000	18.000	18.000																		
	20M	35M	35M	35M	1,81	3,10	3,10	3,10	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220
	8.000	12.000	12.000	12.000																		
20M	35M	35M	53M	1,59	2,72	2,72	4,08	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220	
8.000	12.000	12.000	18.000																			
27M	27M	27M	27M	2,78	2,78	2,78	2,77	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220	
9.000	9.000	9.000	9.000																			
27M	27M	27M	35M	2,56	2,56	2,56	3,42	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220	
9.000	9.000	9.000	12.000																			
27M	27M	27M	53M	2,22	2,22	2,22	4,44	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220	
9.000	9.000	9.000	18.000																			
27M	27M	35M	35M	2,38	2,38	3,17	3,17	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220	
9.000	9.000	12.000	12.000																			
27M	27M	35M	53M	2,08	2,08	2,78	4,16	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220	
9.000	9.000	12.000	18.000																			
27M	35M	35M	35M	2,22	2,96	2,96	2,96	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220	
9.000	12.000	12.000	12.000																			
27M	35M	35M	53M	1,96	2,61	2,61	3,92	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220	
9.000	12.000	12.000	18.000																			
35M	35M	35M	35M	2,78	2,78	2,78	2,77	3,89	11,10	13,32	0,81	2,99	3,89	3,56	13,19	17,14	3,71	A+	4,00	9,20	3220	
12.000	12.000	12.000	12.000																			

Notes Pd = Pdesign CEA = Annual Energy Consumption

replaceable indoor unit with HYDRO-M hydronic module

Note: Hydraulic module and direct expansion indoor units cannot operate at the same time.

MULTISplit

# COMBINATION TABLES

## Outdoor unit: MU2-Y 125M (PENTA)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT					COOLING CAPACITY [KW]					TOTAL COOLING CAPACITY [KW]			POWER INPUT COOLING [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	D	E	TO	B	C	D	E	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SEER	Pd	CEA [kWh]
MU2-Y125M (1x1)	20M	—	—	—	—	2,30	—	—	—	—	1,66	2,00	2,90	0,45	1,02	1,28	1,96	4,44	5,56	3,23	—	—	—	—
	8.000	—	—	—	—	2,50	—	—	—	—	1,66	2,50	3,20	0,45	1,28	1,60	1,96	5,56	6,94	3,23	—	—	—	—
	27M	—	—	—	—	3,50	—	—	—	—	1,66	3,50	3,90	0,45	1,79	2,15	1,96	7,78	9,33	3,23	—	—	—	—
	9.000	—	—	—	—	5,00	—	—	—	—	1,85	5,00	6,50	0,58	1,98	2,28	2,52	8,62	9,91	3,23	—	—	—	—
	35M	—	—	—	—	7,00	—	—	—	—	2,09	7,00	8,20	0,70	2,30	2,42	3,04	10,00	10,50	3,23	—	—	—	—
	12.000	—	—	—	—	2,10	2,10	—	—	—	2,34	4,20	7,38	0,65	1,49	2,21	2,81	6,49	9,60	3,23	TO	5,10	4,20	288
	53M	—	—	—	—	2,39	2,69	—	—	—	2,34	4,78	7,63	0,65	1,70	2,36	2,81	7,38	10,27	3,23	TO	5,10	4,70	323
	18.000	—	—	—	—	2,38	3,57	—	—	—	2,34	5,65	8,00	0,65	2,01	2,55	2,81	8,72	11,09	3,23	TO	5,10	5,50	377
70M	—	—	—	—	2,37	5,32	—	—	—	2,34	7,38	9,84	0,65	2,62	2,70	2,81	11,40	11,76	3,23	TO	5,10	7,00	480	
24.000	—	—	—	—	2,34	6,98	—	—	—	2,34	9,02	11,69	0,65	3,21	3,05	2,81	13,94	13,25	3,23	TO	5,10	9,10	625	
MU2-Y125M (1x2)	20M	20M	—	—	—	2,68	2,68	—	—	—	2,34	5,36	8,00	0,65	1,90	2,55	2,81	8,28	11,09	3,23	TO	5,10	5,30	364
	8.000	8.000	—	—	—	2,67	3,56	—	—	—	2,34	6,23	8,61	0,65	2,21	2,59	2,81	9,62	11,26	3,23	TO	5,10	6,00	412
	20M	27M	—	—	—	2,65	5,31	—	—	—	2,34	7,96	11,07	0,65	2,83	2,86	2,81	12,30	12,42	3,23	TO	5,10	7,50	515
	8.000	9.000	—	—	—	2,62	6,98	—	—	—	2,34	9,60	12,30	0,65	3,41	3,24	2,81	14,83	14,07	3,23	TO	5,10	9,70	666
	20M	35M	—	—	—	3,55	3,55	—	—	—	2,34	7,09	9,23	0,65	2,52	2,70	2,81	10,96	11,76	3,23	TO	5,10	7,00	480
	8.000	12.000	—	—	—	3,53	5,30	—	—	—	2,34	8,83	11,69	0,65	3,14	3,12	2,81	13,64	13,58	3,23	TO	5,10	8,50	583
	20M	53M	—	—	—	3,49	6,98	—	—	—	2,34	10,47	12,30	0,65	3,72	3,43	2,81	16,17	14,90	3,23	TO	5,10	10,00	686
	8.000	18.000	—	—	—	5,28	5,28	—	—	—	2,34	10,56	12,30	0,65	3,75	3,43	2,81	16,32	14,90	3,23	TO	5,10	10,50	721
	20M	70M	—	—	—	4,93	6,57	—	—	—	2,34	11,50	12,50	0,65	3,88	3,43	2,81	16,88	14,90	3,23	TO	5,10	11,50	789
	8.000	24.000	—	—	—																			

Notes Pd = Pdesign CEA = Annual Energy Consumption

# COMBINATION TABLES

## Outdoor unit: MU2-Y 125M (PENTA)

OUTDOOR UNIT	INDOOR UNIT					COOLING CAPACITY [KW]					TOTAL COOLING CAPACITY [KW]			POWER INPUT COOLING [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	D	E	TO	B	C	D	E	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SEER	Pd	CEA [kWh]
MU2-Y 125M (1x3)	20M	20M	20M	—	—	2,30	2,30	2,30	—	—	2,89	6,13	7,38	0,80	1,76	3,05	3,48	7,66	13,25	3,23	TO	5,30	6,00	396
	8.000	8.000	8.000	—	—	2,34	2,34	2,62	—	—	2,89	6,71	8,61	0,80	1,93	3,24	3,48	8,39	14,07	3,23	TO	5,30	6,50	429
	20M	20M	27M	—	—	2,34	2,34	3,50	—	—	2,89	7,58	9,23	0,80	2,18	3,43	3,48	9,47	14,90	3,23	TO	5,30	7,50	495
	8.000	8.000	12.000	—	—	2,34	2,34	5,24	—	—	2,89	9,31	11,07	0,80	2,68	3,62	3,48	11,64	15,73	3,23	TO	5,30	9,00	594
	20M	20M	53M	—	—	2,32	2,32	6,92	—	—	2,89	10,95	12,92	0,80	3,15	3,81	3,48	13,69	16,56	3,23	TO	5,30	11,00	726
	8.000	8.000	24.000	—	—	2,34	2,62	2,62	—	—	2,89	7,29	9,23	0,80	2,10	3,35	3,48	9,11	14,57	3,23	TO	5,30	7,00	462
	20M	27M	27M	—	—	2,34	2,62	3,49	—	—	2,89	8,15	10,46	0,80	2,35	3,50	3,48	10,20	15,23	3,23	TO	5,30	8,00	528
	8.000	9.000	12.000	—	—	2,34	2,62	5,24	—	—	2,89	9,89	11,07	0,80	2,84	3,73	3,48	12,37	16,23	3,23	TO	5,30	9,50	627
	20M	27M	70M	—	—	2,32	2,59	6,92	—	—	2,89	11,53	12,92	0,80	3,32	3,96	3,48	14,42	17,22	3,23	TO	5,30	11,50	759
	8.000	9.000	24.000	—	—	2,34	3,49	3,49	—	—	2,89	9,02	11,07	0,80	2,59	3,62	3,48	11,28	15,73	3,23	TO	5,30	9,00	594
	20M	35M	35M	—	—	2,34	3,49	5,23	—	—	2,89	10,76	12,30	0,80	3,09	3,81	3,48	13,45	16,56	3,23	TO	5,30	10,50	693
	8.000	12.000	18.000	—	—	2,32	3,46	6,92	—	—	2,89	12,40	12,92	0,80	3,57	3,96	3,48	15,50	17,22	3,23	TO	5,30	11,50	759
	20M	53M	53M	—	—	2,33	5,23	5,23	—	—	2,89	12,49	12,92	0,80	3,59	3,96	3,48	15,62	17,22	3,23	TO	5,30	11,50	759
	8.000	18.000	18.000	—	—	2,62	2,62	2,62	—	—	2,89	7,86	10,46	0,80	2,26	3,81	3,48	9,83	16,56	3,23	TO	5,30	8,00	528
	27M	27M	27M	—	—	2,62	2,62	3,49	—	—	2,89	8,73	12,92	0,80	2,51	3,62	3,48	10,92	15,73	3,23	TO	5,30	9,00	594
	9.000	9.000	9.000	—	—	2,62	2,62	5,23	—	—	2,89	10,47	12,30	0,80	3,01	3,81	3,48	13,09	16,56	3,23	TO	5,30	10,50	693
	27M	27M	35M	—	—	2,59	2,59	6,92	—	—	2,89	12,11	12,92	0,80	3,48	3,96	3,48	15,14	17,22	3,23	TO	5,30	11,50	759
	9.000	9.000	24.000	—	—	2,62	3,49	3,49	—	—	2,89	9,60	11,07	0,80	2,76	3,62	3,48	12,00	15,73	3,23	TO	5,30	9,00	594
	27M	35M	35M	—	—	2,62	3,49	5,23	—	—	2,89	11,34	11,69	0,80	3,26	3,81	3,48	14,18	16,56	3,23	TO	5,30	11,00	726
	9.000	12.000	18.000	—	—	2,60	3,46	6,92	—	—	2,89	12,98	12,92	0,80	3,73	3,96	3,48	16,23	17,22	3,23	TO	5,30	11,50	759
	27M	53M	53M	—	—	2,61	5,23	5,23	—	—	2,89	13,07	12,92	0,80	3,76	3,96	3,48	16,35	17,22	3,23	TO	5,30	12,00	792
	9.000	18.000	18.000	—	—	3,49	3,49	3,49	—	—	2,89	10,47	11,07	0,80	3,01	3,73	3,48	13,09	16,23	3,23	TO	5,30	9,50	627
	12.000	12.000	12.000	—	—	2,89	12,20	12,92	0,80	3,51	3,96	3,48	15,26	17,22	3,23	TO	5,30	11,50	759					
	35M	35M	53M	—	—	3,46	3,46	6,92	—	—	2,89	13,84	12,92	0,80	3,98	3,96	3,48	17,31	17,22	3,23	TO	5,30	12,00	792
	12.000	12.000	24.000	—	—	3,48	5,23	5,23	—	—	2,89	13,94	12,92	0,80	4,01	3,96	3,48	17,43	17,22	3,23	TO	5,30	12,00	792
	35M	53M	53M	—	—	2,67	4,00	5,33	—	—	2,89	12,00	12,92	0,80	4,15	3,96	3,48	18,05	17,22	3,23	TO	5,30	12,00	792
	12.000	18.000	24.000	—	—	2,89	12,00	12,92	0,80	4,15	3,96	3,48	18,05	17,22	3,23	TO	5,30	12,00	792					
	53M	53M	53M	—	—	2,89	12,00	12,92	0,80	4,15	3,96	3,48	18,05	17,22	3,23	TO	5,30	12,00	792					
	18.000	18.000	18.000	—	—	2,89	12,00	12,92	0,80	4,15	3,96	3,48	18,05	17,22	3,23	TO	5,30	12,00	792					

COOLING

MULTISplit

Notes Pd = Pdesign CEA = Annual Energy Consumption



# COMBINATION TABLES

## Outdoor unit: MU2-Y 125M (PENTA)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT					COOLING CAPACITY [KW]					TOTAL COOLING CAPACITY [KW]			POWER INPUT COOLING [KW]			TOTAL COOLING CURRENT [A]			EER	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	D	E	TO	B	C	D	E	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SEER	Pd	CEA [kWh]
MU2-Y 125M (1x4)	20M	20M	20M	20M	—	2,30	2,30	2,30	2,30	—	3,69	8,00	10,50	0,91	2,63	3,43	3,97	11,44	14,90	3,23	A+	5,60	8,00	500
	8.000	8.000	8.000	8.000	—	1,98	1,98	1,98	2,55	—	3,69	8,50	11,07	0,91	2,81	3,62	3,97	12,23	15,73	3,23	A+	5,60	8,50	531
	20M	20M	20M	27M	—	2,32	2,32	2,32	3,45	—	3,69	9,50	11,69	0,91	3,17	3,73	3,97	13,79	16,23	3,23	A+	5,60	9,50	594
	8.000	8.000	8.000	12.000	—	2,36	2,36	2,36	5,31	—	3,69	11,50	12,30	0,91	3,91	4,19	3,97	17,00	18,21	3,23	A+	5,60	11,50	719
	20M	20M	20M	53M	—	1,87	1,87	1,87	6,40	—	3,69	12,00	13,53	0,91	4,15	4,38	3,97	18,05	19,04	3,23	A+	5,60	12,00	750
	8.000	8.000	8.000	18.000	—	2,38	2,38	2,67	2,67	—	3,69	9,50	11,69	0,91	3,16	3,73	3,97	13,75	16,23	3,23	A+	5,60	9,50	594
	20M	20M	27M	27M	—	2,00	2,00	2,57	3,43	—	3,69	10,00	12,30	0,91	3,36	4,19	3,97	14,60	18,21	3,23	A+	5,60	10,00	625
	8.000	8.000	9.000	12.000	—	1,96	1,96	2,52	5,05	—	3,69	11,50	12,30	0,91	3,93	4,19	3,97	17,11	18,21	3,23	A+	5,60	11,50	719
	20M	20M	27M	53M	—	1,79	1,79	2,30	6,13	—	3,69	12,00	13,53	0,91	4,15	4,38	3,97	18,05	19,04	3,23	A+	5,60	12,00	750
	8.000	8.000	9.000	18.000	—	1,93	1,93	3,32	3,32	—	3,69	10,50	12,92	0,91	3,56	4,19	3,97	15,48	18,21	3,23	A+	5,60	10,50	656
	20M	20M	35M	35M	—	1,83	1,83	3,14	4,70	—	3,69	11,50	13,53	0,91	3,97	4,19	3,97	17,27	18,21	3,23	A+	5,60	11,50	719
	8.000	8.000	12.000	18.000	—	1,72	1,72	2,95	5,90	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	20M	20M	35M	53M	—	1,72	1,72	4,43	4,43	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	8.000	8.000	18.000	18.000	—	1,54	1,54	3,95	5,27	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	20M	20M	27M	70M	—	2,36	2,65	2,65	2,65	—	3,69	10,00	12,30	0,91	3,35	4,19	3,97	14,56	18,21	3,23	A+	5,60	10,00	625
	8.000	9.000	9.000	24.000	—	1,99	2,55	2,55	3,41	—	3,69	10,50	12,92	0,91	3,55	4,19	3,97	15,43	18,21	3,23	A+	5,60	10,50	656
	20M	27M	27M	35M	—	1,87	2,41	2,41	4,81	—	3,69	11,50	13,53	0,91	3,96	4,19	3,97	17,21	18,21	3,23	A+	5,60	11,50	719
	8.000	9.000	9.000	18.000	—	1,76	2,26	2,26	6,02	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	20M	27M	27M	70M	—	2,31	2,59	3,45	3,45	—	3,69	11,50	13,53	0,91	3,92	4,19	3,97	17,05	18,21	3,23	A+	5,60	11,50	719
	8.000	9.000	12.000	24.000	—	1,83	2,35	3,13	4,70	—	3,69	12,00	13,53	0,91	4,15	4,38	3,97	18,05	19,04	3,23	A+	5,60	12,00	750
	20M	27M	35M	53M	—	1,66	2,13	2,84	5,68	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	8.000	9.000	12.000	18.000	—	1,66	2,13	4,26	4,26	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	20M	27M	53M	70M	—	1,48	1,91	3,82	5,09	—	3,69	12,30	13,53	0,91	4,23	4,38	3,97	18,41	19,04	3,23	A+	5,60	12,40	775
	8.000	9.000	18.000	24.000	—	1,87	3,21	3,21	3,21	—	3,69	11,50	13,53	0,91	3,96	4,19	3,97	17,21	18,21	3,23	A+	5,60	11,50	719
	20M	35M	35M	53M	—	1,71	2,94	2,94	4,41	—	3,69	12,00	13,53	0,91	4,15	4,38	3,97	18,05	19,04	3,23	A+	5,60	12,00	750
	8.000	12.000	12.000	18.000	—	1,57	2,68	2,68	5,37	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	20M	35M	35M	70M	—	1,57	2,68	4,03	4,03	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	8.000	12.000	18.000	18.000	—	2,63	2,63	2,63	2,63	—	3,69	10,50	12,92	0,91	3,54	4,19	3,97	15,38	18,21	3,23	A+	5,60	10,50	656
	27M	27M	27M	35M	—	2,65	2,65	2,65	3,54	—	3,69	11,50	13,53	0,91	3,91	4,19	3,97	17,00	18,21	3,23	A+	5,60	11,50	719
	9.000	9.000	9.000	12.000	—	2,40	2,40	2,40	4,80	—	3,69	12,00	13,53	0,91	4,15	4,38	3,97	18,05	19,04	3,23	A+	5,60	12,00	750
	27M	27M	27M	53M	—	2,17	2,17	2,17	5,79	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	9.000	9.000	9.000	24.000	—	2,46	2,46	3,29	3,29	—	3,69	11,50	13,53	0,91	3,95	4,19	3,97	17,16	18,21	3,23	A+	5,60	11,50	719
	27M	27M	35M	53M	—	2,25	2,25	3,00	4,50	—	3,69	12,00	13,53	0,91	4,15	4,38	3,97	18,05	19,04	3,23	A+	5,60	12,00	750
	9.000	9.000	12.000	18.000	—	2,35	2,35	2,73	5,47	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	27M	27M	35M	70M	—	2,35	2,35	4,10	4,10	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	9.000	9.000	18.000	18.000	—	2,30	3,07	3,07	3,07	—	3,69	11,50	13,53	0,91	3,98	4,19	3,97	17,30	18,21	3,23	A+	5,60	11,50	719
	27M	35M	35M	53M	—	2,17	2,89	2,89	4,34	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	9.000	12.000	12.000	18.000	—	1,94	2,59	2,59	5,18	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	27M	35M	35M	70M	—	1,94	2,59	3,88	3,88	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775
	9.000	12.000	18.000	18.000	—	2,88	2,88	2,88	2,88	—	3,69	11,50	13,53	0,91	3,98	4,19	3,97	17,30	18,21	3,23	A+	5,60	11,50	719
35M	35M	35M	53M	—	2,73	2,73	2,73	4,10	—	3,69	12,30	13,53	0,91	4,26	4,38	3,97	18,50	19,04	3,23	A+	5,60	12,40	775	
12.000	12.000	12.000	18.000	—																				

COOLING



# COMBINATION TABLES

## Outdoor unit: MU2-Y 125M (PENTA)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT					HEATING CAPACITY [KW]					TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP		SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	D	E	TO	B	C	D	E	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.	Class	SCOP	Pd	CEA [kWh]		
MU2-Y125M (1x1)	20M	8.000	—	—	—	2,50	—	—	—	—	1,66	2,50	2,90	0,45	0,67	0,83	1,96	2,90	3,62	3,71	—	—	—	—	
	27M	9.000	—	—	—	3,00	—	—	—	—	1,66	3,00	3,20	0,45	0,80	1,00	1,96	3,48	4,35	3,71	—	—	—	—	
	35M	12.000	—	—	—	3,80	—	—	—	—	1,66	3,80	3,90	0,45	1,01	1,22	1,96	4,41	5,29	3,71	—	—	—	—	
	53M	18.000	—	—	—	5,20	—	—	—	—	1,85	5,20	7,00	0,58	1,38	1,59	2,52	6,01	6,91	3,71	—	—	—	—	
	70M	24.000	—	—	—	7,20	—	—	—	—	2,09	7,20	8,50	0,70	1,90	2,00	3,04	8,28	8,70	3,71	—	—	—	—	
	20M	20M	8.000	8.000	—	—	2,50	2,50	—	—	—	2,34	5,00	7,38	0,56	1,32	1,92	2,45	5,72	8,36	3,71	B	3,00	5,10	2380
	20M	27M	8.000	9.000	—	—	2,45	3,15	—	—	—	2,34	5,60	7,63	0,56	1,47	2,06	2,45	6,41	8,94	3,71	B	3,00	5,70	2660
	20M	35M	8.000	12.000	—	—	2,21	3,79	—	—	—	2,34	6,00	8,00	0,56	1,58	2,22	2,45	6,86	9,66	3,71	B	3,00	6,20	2893
20M	53M	8.000	18.000	—	—	2,24	5,76	—	—	—	2,34	8,00	9,84	0,56	2,11	2,35	2,45	9,15	10,23	3,71	B	3,00	8,10	3780	
20M	70M	8.000	24.000	—	—	2,21	7,59	—	—	—	2,34	9,80	11,69	0,56	2,58	2,65	2,45	11,21	11,53	3,71	B	3,00	8,50	3967	
27M	27M	9.000	9.000	—	—	3,00	3,00	—	—	—	2,34	6,00	8,00	0,56	1,58	2,22	2,45	6,86	9,66	3,71	B	3,00	6,20	2893	
27M	35M	9.000	12.000	—	—	2,91	3,89	—	—	—	2,34	6,80	8,61	0,56	1,79	2,25	2,45	7,78	9,80	3,71	B	3,00	6,80	3173	
27M	53M	9.000	18.000	—	—	2,93	5,87	—	—	—	2,34	8,80	11,07	0,56	2,32	2,49	2,45	10,07	10,81	3,71	B	3,00	8,50	3967	
27M	70M	9.000	24.000	—	—	2,78	7,42	—	—	—	2,34	10,20	12,30	0,56	2,68	2,82	2,45	11,67	12,25	3,71	B	3,00	8,50	3967	
35M	35M	12.000	12.000	—	—	3,75	3,75	—	—	—	2,34	7,50	9,23	0,56	1,97	2,35	2,45	8,58	10,23	3,71	B	3,00	7,30	3407	
35M	53M	12.000	18.000	—	—	3,76	5,64	—	—	—	2,34	9,40	11,69	0,56	2,47	2,72	2,45	10,76	11,82	3,71	B	3,00	8,50	3967	
35M	70M	12.000	24.000	—	—	3,50	7,00	—	—	—	2,34	10,50	12,30	0,56	2,76	2,98	2,45	12,01	12,97	3,71	B	3,00	8,50	3967	
53M	53M	18.000	18.000	—	—	5,50	5,50	—	—	—	2,34	11,00	12,30	0,56	2,89	2,98	2,45	12,59	12,97	3,71	B	3,00	8,50	3967	
53M	70M	18.000	24.000	—	—	4,93	6,57	—	—	—	2,34	11,50	12,50	0,56	3,01	2,98	2,45	13,09	12,97	3,71	B	3,00	8,50	3967	

Notes Pd = Pdesign CEA = Annual Energy Consumption

# COMBINATION TABLES

## Outdoor unit: MU2-Y 125M (PENTA)

OUTDOOR UNIT	INDOOR UNIT					HEATING CAPACITY [KW]					TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	D	E	TO	B	C	D	E	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SCOP	Pd	CEA [kWh]
MU2-Y 125M (1x3)	20M	20M	20M	—	—	2.50	2.50	2.50	—	—	2.89	7.50	8.61	0.70	1.95	2.65	3.03	8.47	11.53	3.71	B	3.20	7.30	3194
	8.000	8.000	8.000	—	—	2.37	2.37	3.05	—	—	2.89	7.80	9.23	0.70	2.03	2.82	3.03	8.81	12.25	3.71	B	3.20	7.40	3238
	20M	20M	27M	—	—	2.29	2.29	3.92	—	—	2.89	8.50	9.84	0.70	2.21	2.98	3.03	9.60	12.97	3.71	B	3.20	7.50	3281
	8.000	8.000	9.000	—	—	2.52	2.52	6.47	—	—	2.89	11.50	12.30	0.70	2.99	3.15	3.03	12.99	13.69	3.71	B	3.20	8.50	3719
	20M	20M	35M	—	—	2.21	2.21	7.58	—	—	2.89	12.00	12.92	0.70	3.12	3.32	3.03	13.55	14.41	3.71	B	3.20	8.50	3719
	8.000	8.000	24.000	—	—	2.38	3.06	3.06	—	—	2.89	8.50	9.84	0.70	2.21	2.92	3.03	9.60	12.68	3.71	B	3.20	7.50	3281
	20M	27M	27M	—	—	2.50	3.21	4.29	—	—	2.89	10.00	12.30	0.70	2.60	3.05	3.03	11.29	13.26	3.71	B	3.20	8.00	3500
	8.000	9.000	9.000	—	—	2.37	3.04	6.09	—	—	2.89	11.50	12.30	0.70	2.99	3.25	3.03	12.99	14.13	3.71	B	3.20	8.50	3719
	20M	27M	70M	—	—	2.10	2.70	7.20	—	—	2.89	12.00	12.92	0.70	3.12	3.45	3.03	13.55	14.99	3.71	B	3.20	8.50	3719
	8.000	9.000	24.000	—	—	2.48	4.26	4.26	—	—	2.89	11.00	12.30	0.70	2.86	3.15	3.03	12.42	13.69	3.71	B	3.20	8.50	3719
	20M	35M	35M	—	—	2.18	3.73	5.59	—	—	2.89	11.50	12.30	0.70	2.99	3.32	3.03	12.99	14.41	3.71	B	3.20	8.50	3719
	8.000	12.000	12.000	—	—	1.95	3.35	6.70	—	—	2.89	12.00	12.92	0.70	3.12	3.45	3.03	13.55	14.99	3.71	B	3.20	8.50	3719
	20M	35M	70M	—	—	1.95	5.02	5.02	—	—	2.89	12.00	12.92	0.70	3.12	3.45	3.03	13.55	14.99	3.71	B	3.20	8.50	3719
	8.000	12.000	18.000	—	—	3.33	3.33	3.33	—	—	2.89	10.00	12.30	0.70	2.60	3.32	3.03	11.29	14.41	3.71	B	3.20	8.50	3719
	20M	53M	53M	—	—	3.30	3.30	4.40	—	—	2.89	11.00	12.30	0.70	2.86	3.15	3.03	12.42	13.69	3.71	B	3.20	8.50	3719
	8.000	18.000	18.000	—	—	2.88	2.88	5.75	—	—	2.89	11.50	12.30	0.70	2.99	3.32	3.03	12.99	14.41	3.71	B	3.20	8.50	3719
	27M	27M	27M	—	—	2.57	2.57	6.86	—	—	2.89	12.00	12.92	0.70	3.12	3.45	3.03	13.55	14.99	3.71	B	3.20	8.50	3719
	9.000	9.000	12.000	—	—	3.14	4.18	4.18	—	—	2.89	11.50	12.30	0.70	2.99	3.15	3.03	12.99	13.69	3.71	B	3.20	8.50	3719
	27M	27M	53M	—	—	2.77	3.69	5.54	—	—	2.89	12.00	12.92	0.70	3.12	3.32	3.03	13.55	14.41	3.71	B	3.20	8.50	3719
	9.000	12.000	18.000	—	—	2.40	3.20	6.40	—	—	2.89	12.00	12.92	0.70	3.12	3.45	3.03	13.55	14.99	3.71	B	3.20	8.50	3719
	27M	35M	35M	—	—	2.40	4.80	4.80	—	—	2.89	12.00	12.92	0.70	3.12	3.45	3.03	13.55	14.99	3.71	B	3.20	8.50	3719
	9.000	18.000	18.000	—	—	3.83	3.83	3.83	—	—	2.89	11.50	12.30	0.70	2.99	3.25	3.03	12.99	14.13	3.71	B	3.20	8.50	3719
	35M	35M	35M	—	—	3.43	3.43	5.14	—	—	2.89	12.00	12.92	0.70	3.12	3.45	3.03	13.55	14.99	3.71	B	3.20	8.50	3719
	12.000	12.000	12.000	—	—	3.00	3.00	6.00	—	—	2.89	12.00	12.92	0.70	3.12	3.45	3.03	13.55	14.99	3.71	B	3.20	8.50	3719
	35M	35M	70M	—	—	3.00	4.50	4.50	—	—	2.89	12.00	12.92	0.70	3.12	3.45	3.03	13.55	14.99	3.71	B	3.20	8.50	3719
	12.000	12.000	24.000	—	—	2.67	4.00	5.33	—	—	2.89	12.00	12.92	0.70	3.12	3.45	3.03	13.55	14.99	3.71	B	3.20	8.50	3719
	35M	53M	53M	—	—	4.00	4.00	4.00	—	—	2.89	12.00	12.92	0.70	3.09	3.45	3.03	13.45	14.99	3.71	B	3.20	8.50	3719
	12.000	18.000	18.000	—	—																			

Notes Pd = Pdesign CEA = Annual Energy Consumption

MULTISplit

# COMBINATION TABLES

## Outdoor unit: MU2-Y 125M (PENTA)

MULTISplit

OUTDOOR UNIT	INDOOR UNIT				HEATING CAPACITY [KW]					TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)				
	TO	B	C	D	E	TO	B	C	D	E	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.		Max.	Class	SCOP	Pd	CEA [kWh]
MU2-Y 125M (1x4)	20M 8.000	20M 8.000	20M 8.000	20M 8.000	-	2,50	2,50	2,50	2,50	-	3,69	10,00	12,67	0,80	2,56	2,98	3,46	11,12	12,97	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	20M 8.000	27M 9.000	-	2,57	2,57	2,57	3,30	-	3,69	11,00	12,92	0,80	2,81	3,15	3,46	12,23	13,69	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	20M 8.000	35M 12.000	-	2,50	2,50	2,50	4,29	-	3,69	11,80	13,53	0,80	3,02	3,25	3,46	13,12	14,13	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	20M 8.000	53M 18.000	-	2,15	2,15	2,15	5,54	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	20M 8.000	70M 24.000	-	1,91	1,91	1,91	6,56	-	3,69	12,30	13,53	0,80	3,15	3,81	3,46	13,68	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	27M 9.000	27M 9.000	-	2,63	2,63	3,38	3,38	-	3,69	12,00	13,53	0,80	3,07	3,25	3,46	13,34	14,13	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	27M 9.000	35M 12.000	-	2,40	2,40	3,09	4,11	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	27M 9.000	53M 18.000	-	2,35	2,35	2,63	5,27	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	27M 9.000	70M 24.000	-	1,83	1,83	2,36	6,28	-	3,69	12,30	13,53	0,80	3,15	3,81	3,46	13,68	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	35M 12.000	35M 12.000	-	2,21	2,21	3,79	3,79	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	35M 12.000	53M 18.000	-	1,91	1,91	3,27	4,91	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	35M 12.000	70M 24.000	-	1,72	1,72	2,95	5,90	-	3,69	12,30	13,53	0,80	3,15	3,81	3,46	13,68	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	53M 18.000	53M 18.000	-	1,68	1,68	4,32	4,32	-	3,69	12,00	13,53	0,80	3,07	3,81	3,46	13,34	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	20M 8.000	53M 18.000	70M 24.000	-	1,54	1,54	3,95	5,27	-	3,69	12,30	13,53	0,80	3,15	3,81	3,46	13,68	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	27M 9.000	27M 9.000	27M 9.000	-	2,47	3,18	3,18	3,18	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	20M 8.000	27M 9.000	27M 9.000	35M 12.000	-	2,27	2,92	2,92	3,89	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	20M 8.000	27M 9.000	27M 9.000	53M 18.000	-	1,95	2,51	2,51	5,02	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	20M 8.000	27M 9.000	27M 9.000	70M 24.000	-	1,76	2,26	2,26	6,02	-	3,69	12,30	13,53	0,80	3,15	3,81	3,46	13,68	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	27M 9.000	35M 12.000	35M 12.000	-	2,10	2,70	3,60	3,60	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	20M 8.000	27M 9.000	35M 12.000	53M 18.000	-	1,83	2,35	3,13	4,70	-	3,69	12,00	13,53	0,80	3,07	3,81	3,46	13,34	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	27M 9.000	35M 12.000	70M 24.000	-	1,66	2,13	2,84	5,68	-	3,69	12,30	13,53	0,80	3,15	3,81	3,46	13,68	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	27M 9.000	53M 18.000	53M 18.000	-	1,62	2,38	4,15	4,15	-	3,69	12,00	13,53	0,80	3,07	3,81	3,46	13,34	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	27M 9.000	53M 18.000	70M 24.000	-	1,48	1,91	3,82	5,09	-	3,69	12,30	13,53	0,80	3,15	3,81	3,46	13,68	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	35M 12.000	35M 12.000	35M 12.000	-	1,95	3,35	3,35	3,35	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	20M 8.000	35M 12.000	35M 12.000	53M 18.000	-	1,71	2,94	2,94	4,41	-	3,69	12,00	13,53	0,80	3,07	3,81	3,46	13,34	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	35M 12.000	35M 12.000	70M 24.000	-	1,57	2,68	2,68	5,37	-	3,69	12,30	13,53	0,80	3,15	3,81	3,46	13,68	16,58	3,71	TO	3,40	8,80	3624
	20M 8.000	35M 12.000	53M 18.000	53M 18.000	-	1,53	2,62	3,93	3,93	-	3,69	12,00	13,53	0,80	3,07	3,81	3,46	13,34	16,58	3,71	TO	3,40	8,80	3624
	27M 9.000	27M 9.000	27M 9.000	27M 9.000	-	3,00	3,00	3,00	3,00	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	27M 9.000	27M 9.000	27M 9.000	35M 12.000	-	2,77	2,77	2,77	3,69	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	27M 9.000	27M 9.000	27M 9.000	53M 18.000	-	2,40	2,40	2,40	4,80	-	3,69	12,00	13,53	0,80	3,07	3,81	3,46	13,34	16,58	3,71	TO	3,40	8,80	3624
	27M 9.000	27M 9.000	27M 9.000	70M 24.000	-	2,17	2,17	2,17	5,79	-	3,69	12,30	13,53	0,80	3,15	3,81	3,46	13,68	16,58	3,71	TO	3,40	8,80	3624
	27M 9.000	27M 9.000	35M 12.000	35M 12.000	-	2,57	2,57	3,43	3,43	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	27M 9.000	27M 9.000	35M 12.000	53M 18.000	-	2,25	2,25	3,00	4,50	-	3,69	12,00	13,53	0,80	3,07	3,81	3,46	13,34	16,58	3,71	TO	3,40	8,80	3624
	27M 9.000	27M 9.000	35M 12.000	70M 24.000	-	2,35	2,35	2,73	5,47	-	3,69	12,30	13,53	0,80	3,15	3,81	3,46	13,68	16,58	3,71	TO	3,40	8,80	3624
	27M 9.000	27M 9.000	53M 18.000	53M 18.000	-	2,00	2,00	4,00	4,00	-	3,69	12,00	13,53	0,80	3,07	3,81	3,46	13,34	16,58	3,71	TO	3,40	8,80	3624
	27M 9.000	35M 12.000	35M 12.000	35M 12.000	-	2,40	3,20	3,20	3,20	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
	27M 9.000	35M 12.000	35M 12.000	53M 18.000	-	2,12	2,82	2,82	4,24	-	3,69	12,00	13,53	0,80	3,07	3,81	3,46	13,34	16,58	3,71	TO	3,40	8,80	3624
	27M 9.000	35M 12.000	35M 12.000	70M 24.000	-	1,94	2,59	2,59	5,18	-	3,69	12,30	13,53	0,80	3,15	3,81	3,46	13,68	16,58	3,71	TO	3,40	8,80	3624
	27M 9.000	35M 12.000	53M 18.000	53M 18.000	-	1,89	2,53	3,79	3,79	-	3,69	12,00	13,53	0,80	3,07	3,81	3,46	13,34	16,58	3,71	TO	3,40	8,80	3624
	35M 12.000	35M 12.000	35M 12.000	35M 12.000	-	3,00	3,00	3,00	3,00	-	3,69	12,00	13,53	0,80	3,07	3,65	3,46	13,34	15,86	3,71	TO	3,40	8,80	3624
35M 12.000	35M 12.000	35M 12.000	53M 18.000	-	2,67	2,67	2,67	4,00	-	3,69	12,00	13,53	0,80	3,07	3,81	3,46	13,34	16,58	3,71	TO	3,40	8,80	3624	

HEATING

Notes Pd = Pdesign CEA = Annual Energy Consumption

# COMBINATION TABLES

## Outdoor unit: MU2-Y 125M (PENTA)

OUTDOOR UNIT	INDOOR UNIT					HEATING CAPACITY [KW]					TOTAL HEATING CAPACITY [KW]			ABSORBED HEATING CAPACITY [KW]			TOTAL COOLING CURRENT [A]			COP	SEASONAL EFFICIENCY (EN14825)			
	TO	B	C	D	E	TO	B	C	D	E	Min.	Std.	Max.	Min.	Std.	Max.	Min.	Std.	Max.		Class	SCOP	Pd	CEA [kWh]
MU2Y 125M (1x5)	20M 8.000	20M 8.000	20M 8.000	20M 8.000	20M 8.000	2,46	2,46	2,46	2,46	2,46	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	20M 8.000	27M 9.000	2,33	2,33	2,33	2,33	2,99	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	20M 8.000	35M 12.000	2,15	2,15	2,15	2,15	3,69	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	20M 8.000	53M 18.000	1,87	1,87	1,87	1,87	4,81	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	20M 8.000	70M 24.000	1,66	1,66	1,66	1,66	5,68	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	27M 9.000	27M 9.000	2,21	2,21	2,21	2,84	2,84	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	27M 9.000	35M 12.000	2,35	2,35	2,35	2,64	3,51	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	27M 9.000	53M 18.000	1,79	1,79	1,79	2,31	4,61	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	27M 9.000	70M 24.000	1,59	1,59	1,59	2,35	5,47	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	35M 12.000	35M 12.000	1,91	1,91	1,91	3,28	3,28	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	35M 12.000	53M 18.000	1,69	1,69	1,69	2,89	4,34	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	35M 12.000	70M 24.000	1,51	1,51	1,51	2,59	5,18	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	20M 8.000	53M 18.000	53M 18.000	1,51	1,51	1,51	3,88	3,88	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	27M 9.000	27M 9.000	27M 9.000	2,10	2,10	2,70	2,70	2,70	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	27M 9.000	27M 9.000	35M 12.000	1,96	1,96	2,52	2,52	3,35	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	27M 9.000	27M 9.000	53M 18.000	1,72	1,72	2,21	2,21	4,43	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	27M 9.000	27M 9.000	70M 24.000	1,54	1,54	1,98	1,98	5,27	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	27M 9.000	35M 12.000	35M 12.000	1,83	1,83	2,36	3,14	3,14	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	27M 9.000	35M 12.000	53M 18.000	1,62	1,62	2,39	2,78	4,18	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	27M 9.000	53M 18.000	53M 18.000	1,46	1,46	1,88	3,75	3,75	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	35M 12.000	35M 12.000	35M 12.000	1,72	1,72	2,95	2,95	2,95	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	20M 8.000	35M 12.000	35M 12.000	53M 18.000	1,54	1,54	2,64	2,64	3,95	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	27M 9.000	27M 9.000	27M 9.000	27M 9.000	2,30	2,57	2,57	2,57	2,57	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	27M 9.000	27M 9.000	27M 9.000	35M 12.000	1,87	2,41	2,41	2,41	3,21	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	27M 9.000	27M 9.000	27M 9.000	53M 18.000	1,66	2,13	2,13	2,13	4,26	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	27M 9.000	27M 9.000	27M 9.000	70M 24.000	1,48	1,91	1,91	1,91	5,09	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	27M 9.000	27M 9.000	35M 12.000	35M 12.000	1,76	2,26	2,26	3,01	3,01	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	27M 9.000	27M 9.000	35M 12.000	53M 18.000	1,57	2,31	2,31	2,68	4,03	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	27M 9.000	35M 12.000	35M 12.000	35M 12.000	1,66	2,13	2,84	2,84	2,84	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	27M 9.000	35M 12.000	35M 12.000	53M 18.000	1,48	1,91	2,54	2,54	3,82	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	20M 8.000	35M 12.000	35M 12.000	35M 12.000	35M 12.000	1,57	2,68	2,68	2,68	2,68	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	27M 9.000	27M 9.000	27M 9.000	27M 9.000	27M 9.000	2,46	2,46	2,46	2,46	2,46	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	27M 9.000	27M 9.000	27M 9.000	27M 9.000	35M 12.000	2,31	2,31	2,31	2,31	3,08	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	27M 9.000	27M 9.000	27M 9.000	27M 9.000	53M 18.000	2,35	2,35	2,35	2,35	4,10	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	27M 9.000	27M 9.000	27M 9.000	35M 12.000	35M 12.000	2,17	2,17	2,17	2,89	2,89	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	27M 9.000	27M 9.000	27M 9.000	35M 12.000	53M 18.000	1,94	1,94	1,94	2,59	3,88	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	27M 9.000	27M 9.000	35M 12.000	35M 12.000	35M 12.000	2,35	2,35	2,73	2,73	2,73	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611
	27M 9.000	35M 12.000	35M 12.000	35M 12.000	35M 12.000	1,94	2,59	2,59	2,59	2,59	4,18	12,30	14,94	0,90	3,32	4,14	3,89	14,41	18,02	3,71	TO	3,80	9,80	3611

MULTISplit

Notes Pd = Pdesign CEA = Annual Energy Consumption