CONTROLLER LINEUP

Wireless Remote Controllers	Wired Remote Controllers	Centralized Control Solutions	
RM12F1	WDC3-86S	TC3-10.1	
RM12F	WDC3-86T		
	WDC3-120T	IMMPRO II	

Network Control System	BMS Gateways	Accessories	
GW3-CLOUD +	GW3-BAC	MA3-EK	
	GW3-MOD		
GW3-CLOUD +	GW3-LON	DIAGNOSIS(A)	
Cloud Control/ APP	GW3-KNX		
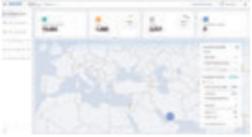
META is the abbreviation of Midea Evaporating Temperature Alteration
Further upgraded META technology to maximize ENERGY SAVING.

Remote Controllers

Wired Controllers

Features

| Model	RM12F1	RM12F
On / Off	●	●
Mode selection	●	●
Temperature setting	● (0.5℃ or 1℃ steps)	● (0.5℃ or 1℃ steps)
7-speed fan control	●	●
Auto swing	●	●
5-step swing louver	●	●
Address setting	●	●
Follow me	×	●
Eco mode	●	●
Silent mode	●	●
Display shut-off	●	●
Daily timer	●	●
Self Cleaning Mode setting	●	×
Sterilization function setting	●	×
Keyboard lock	●	●
Background light	●	●
Indoor Unit parameter setting	●	●
Dimensions (H×W×D) (mm)	170×48×20	170×48×20
Batteries	1.5V (LR03/AAA) × 2	
Indoor unit series	V8 IDU, 3rd and 2nd generation IDU	

Note:
●: equipped as standard; ×: without this function

Follow Me

With the follow me function, the indoor unit responds to the temperature measured by the temperature sensor built-in to the wireless remote controller, rather than the temperature sensor in the indoor unit itself, enabling more precise control of the temperature in the user's immediate environment.
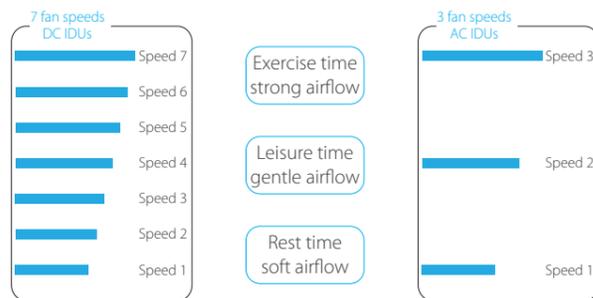
5 Swing Angles for Louver

Thanks to the 5 swing angles for indoor unit louver, the air flow direction can be controlled more precisely.

Step
Swing
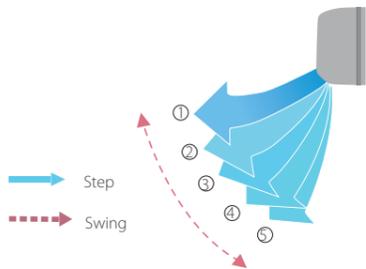
Multiple Fan Speed Control

The DC Series comes with 7 indoor fan speed options and AC Series with 3 indoor fan speed options to meet the needs of different indoor conditions.

7 fan speeds
DC IDUs
Speed 7
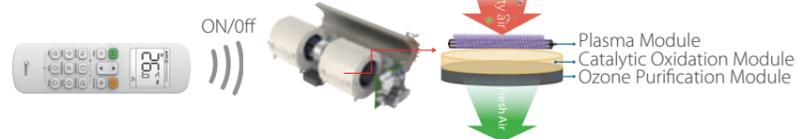Speed 6
Speed 5
Speed 4
Speed 3
Speed 2
Speed 1

Exercise time strong airflow
Leisure time gentle airflow
Rest time soft airflow

3 fan speeds
AC IDUs
Speed 3
Speed 2
Speed 1

Self Cleaning Mode setting

Can be turned on Self Cleaning mode.

ON

Frosting
Frost makes the surface of heat exchanger dirt stripping

Defrosting
Water flow flushes dirt from heat exchanger

Drying
55℃ high temperature drying water, effective sterilization

*The self clean function is only available for V8 mini VRF.

Sterilization function setting

If the sterilization function is available for the indoor unit, it can be turned on or turned off using this setting.

ON/0ff

Plasma Module
Catalytic Oxidation Module
Ozone Purification Module